

**record-usa**4324 PHIL HARGETT CT.
MONROE, NC 28110
(704) 289 - 9212

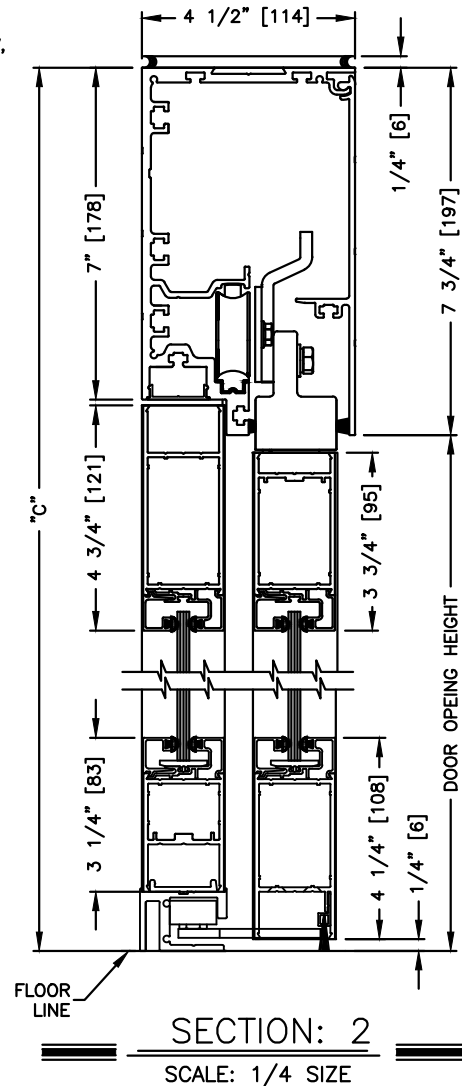
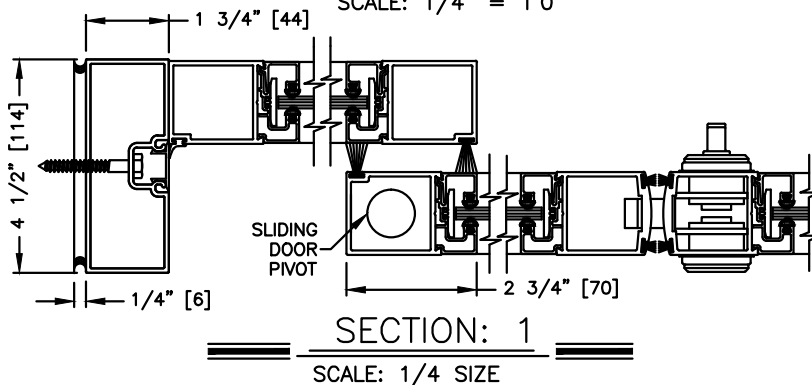
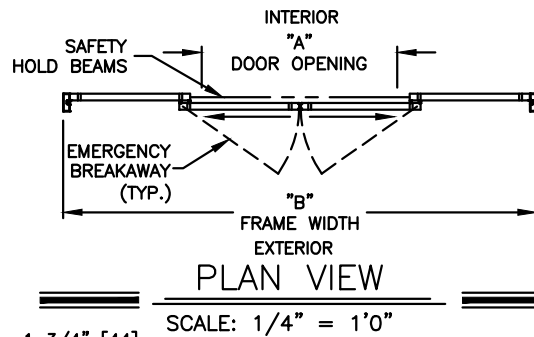
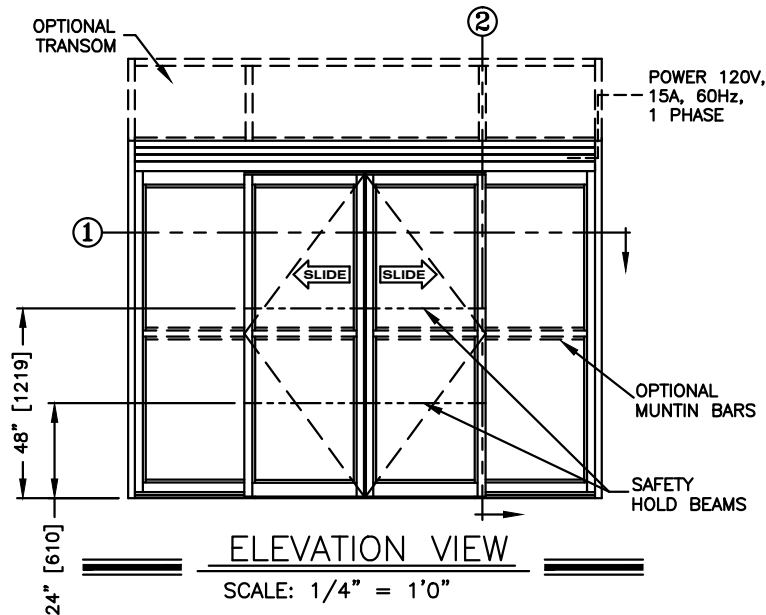
JOB NAME: _____

LOCATION: _____

SERIES 5100 AUTOMATIC SLIDING DOORS

TYPE: 5103-1, 0-SX-SX-0, BI-PART

PAGE 51-2.03

**NOTES:**

1. See sheets 51-2.86 thru 51-2.91 for optional muntins, bottom rails, transoms, glazing variations, bottom guides & thresholds.

DIMENSIONS FOR STANDARD NARROW STILE PACKAGES

DOOR OPENING "A"	STD. PACKAGE WIDTH "B"	STD. PACKAGE HEIGHT "C" W/O THRESHOLD	DOOR OPENING HEIGHT W/THRESHOLD	DOOR OPENING HEIGHT W/O THRESHOLD	MAX OPENING MANUALLY
42-5/8 (1083)	108 (2743)	91 (2311)	82-3/4 (2102)	83-1/4 (2115)	49-5/8 (1260)
48-5/8 (1235)	120 (3048)	91 (2311)	82-3/4 (2102)	83-1/4 (2115)	55-5/8 (1413)
60-5/8 (1540)	144 (3658)	91 (2311)	82-3/4 (2102)	83-1/4 (2115)	67-5/8 (1718)
72-5/8 (1845)	168 (4267)	91 (2311)	82-3/4 (2102)	83-1/4 (2115)	79-5/8 (2022)
84-5/8 (2149)	192 (4877)	91 (2311)	82-3/4 (2102)	83-1/4 (2115)	91-5/8 (2327)

Masonry opening is 1/4" (6) per side larger and 1/4" taller than package dimensions. Measurements given in inches (millimeters).