



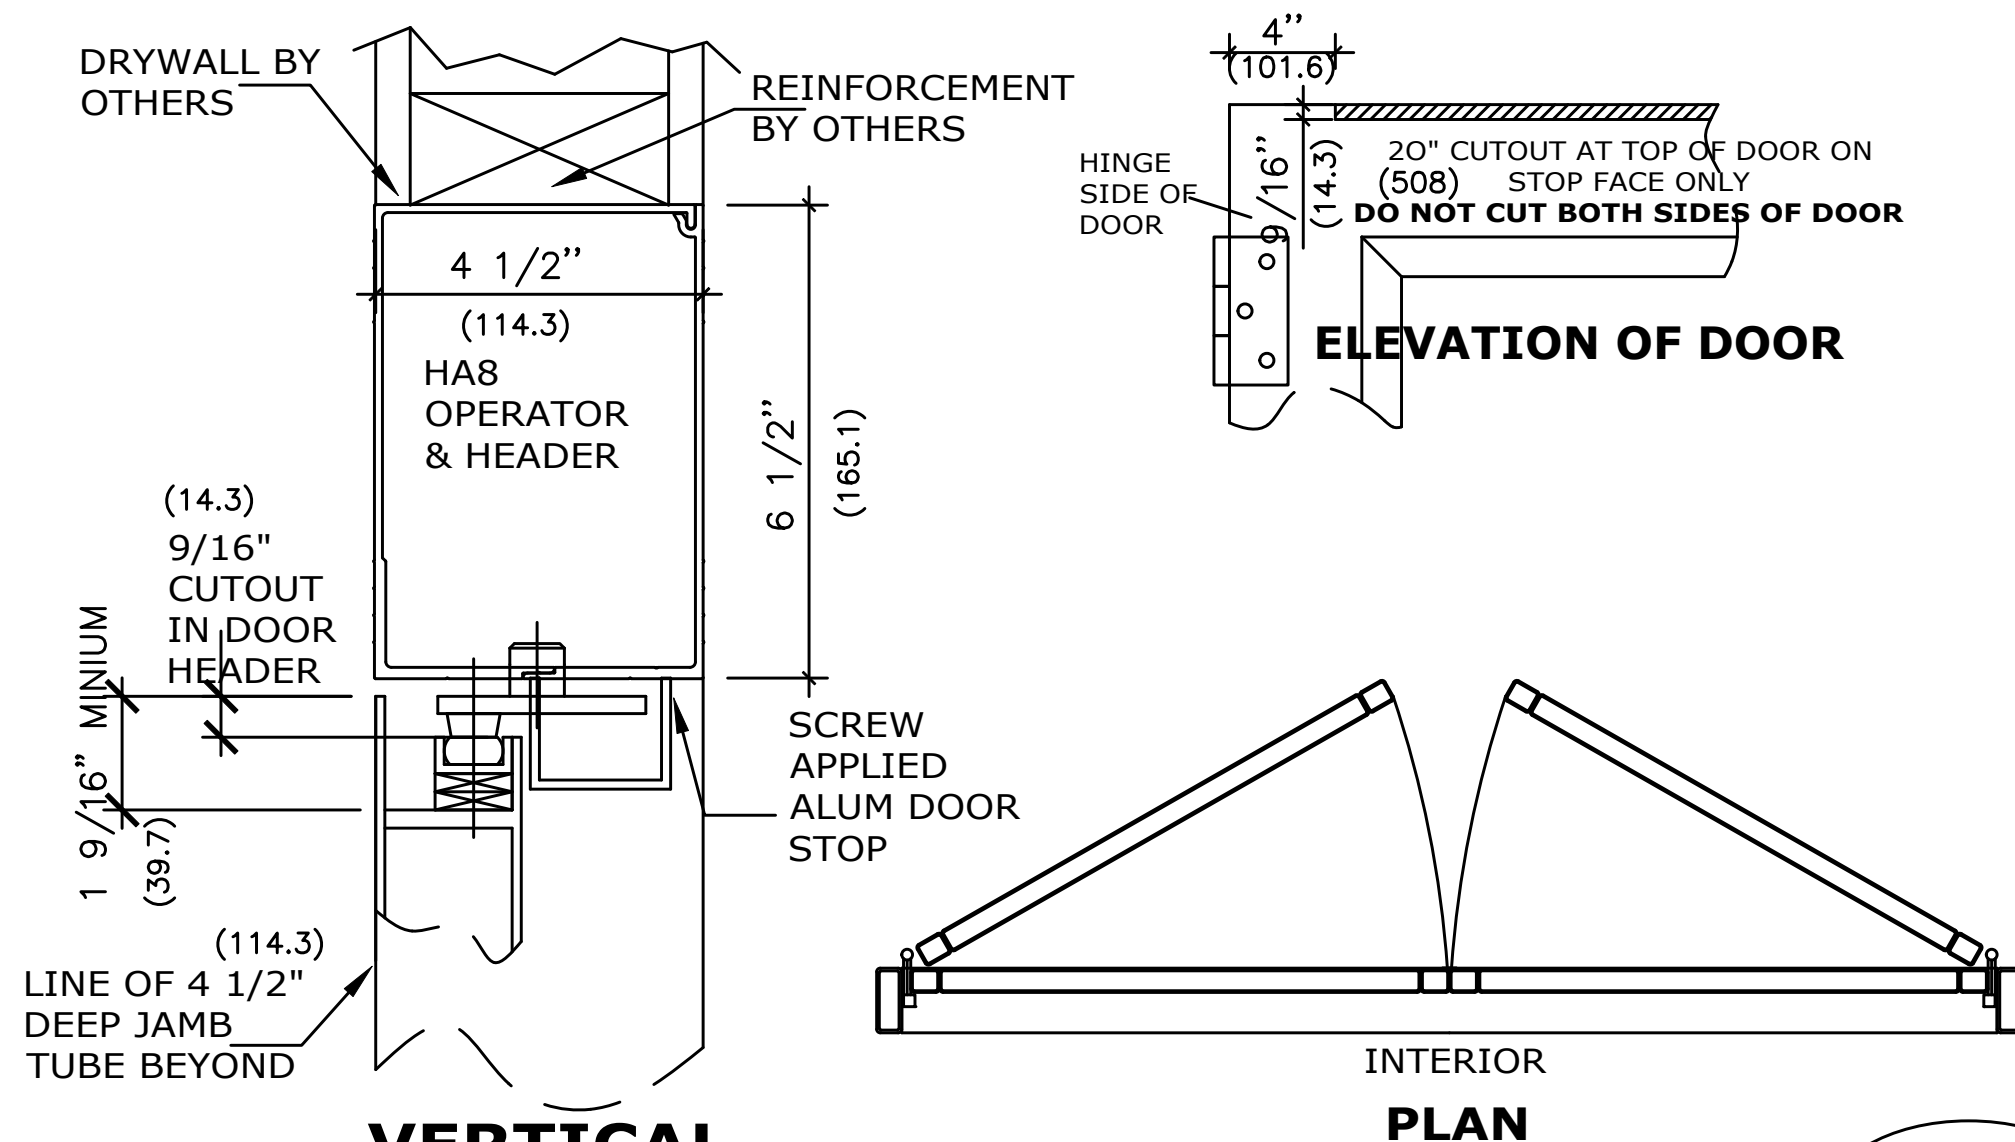


**APPLICATION:**  
LOW ENERGY OPERATOR  
PAIR DOORS BUTT HUNG/OFFSET PIVOT

NOTE: DRAWING IS DIMENSIONED IN BOTH INCHES & METRIC (mm)  
AUTOMATIC SWING DOOR OPERATOR SHALL BE "FA8" CETL USA  
APPROVED, CONFORMING TO UL STD. 325 & ANSI-BHMA STD. A156.19  
FIRE RATED TO UL STD. 10(B); UL STD. 10(C), CERTIFIED TO CAN.  
CSA STD. C22.2#247 AS MANUFACTURED BY RECORDED-USA.  
32" (813) CLEAR OPENING REQUIRED TO MEET ADA REQUIREMENT.

STANDARD FINISH: ANODIZED, CLEAR; DARK BRONZE;  
SPECIAL FINISHES ARE AVAILABLE

120V AC. 60HZ. 15A.  
BY ELEC. CONTRACTOR.

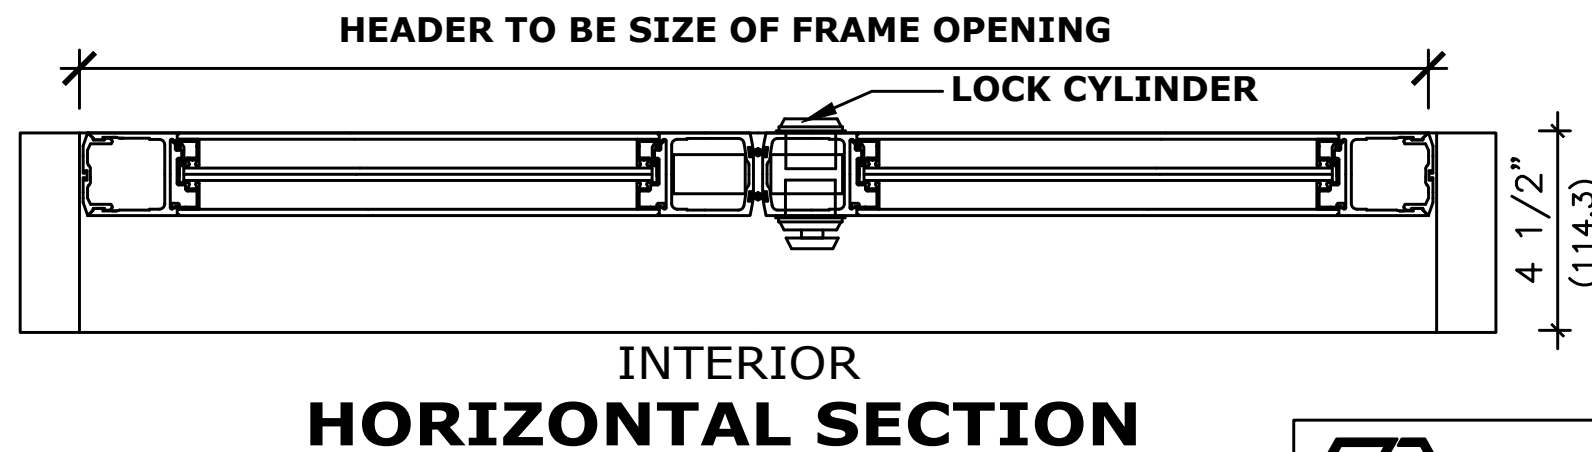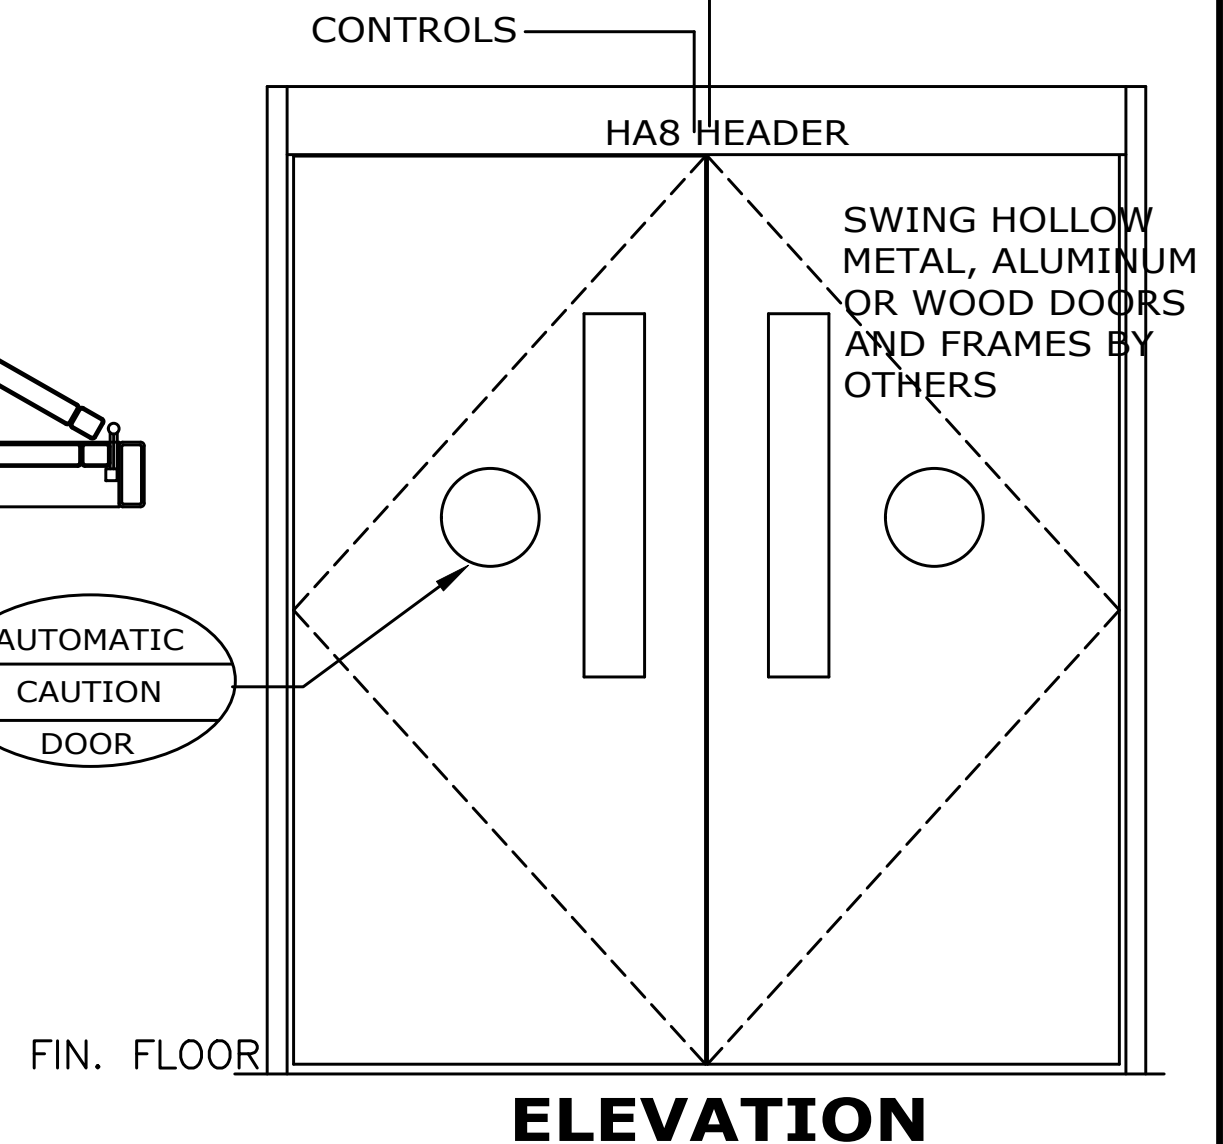

TEL. 877-348-6837 (CANADA)  
TEL. 833-921-1337 (USA)  
www.recorddoors.com

|              |                 |
|--------------|-----------------|
| JOB NAME:    | SHEET NO.<br>12 |
| LOCATION:    |                 |
| DOOR NUMBER: | SECTION<br>HA   |