




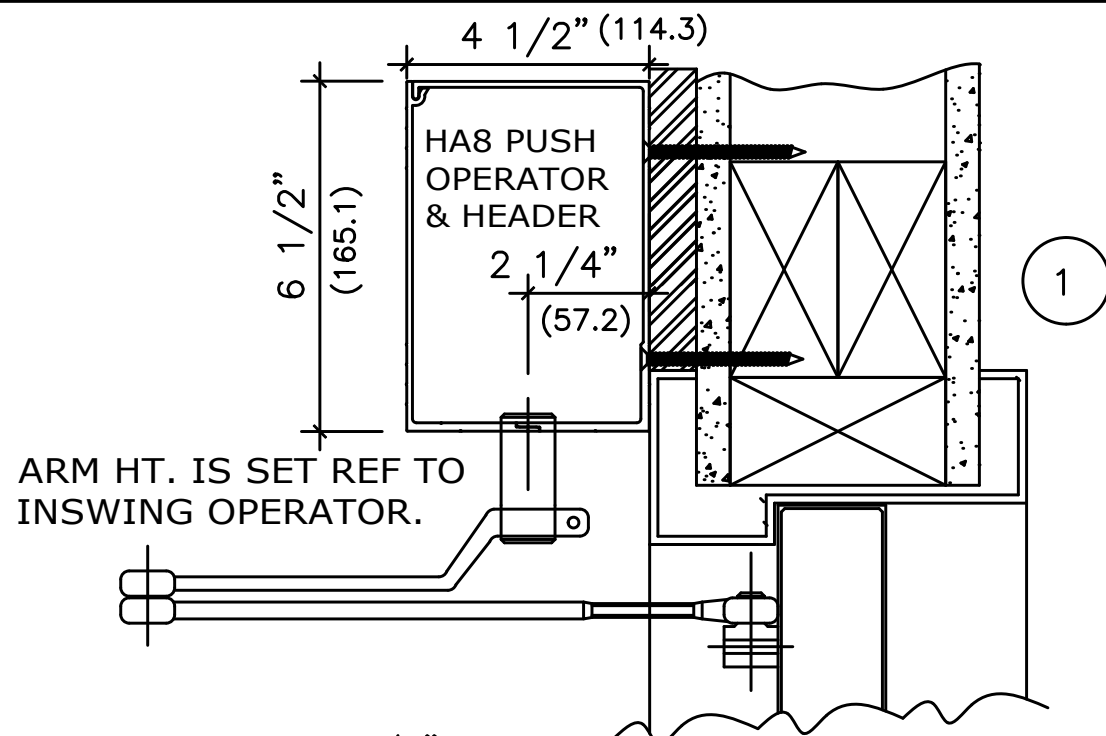

1

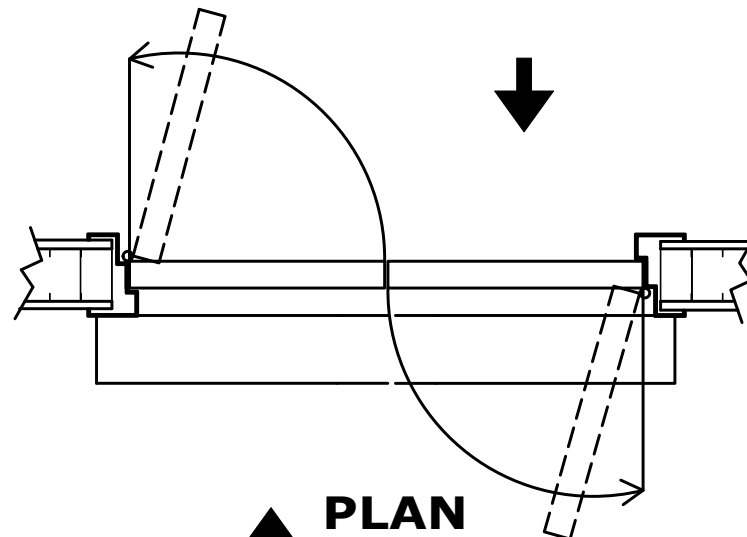


PLAN

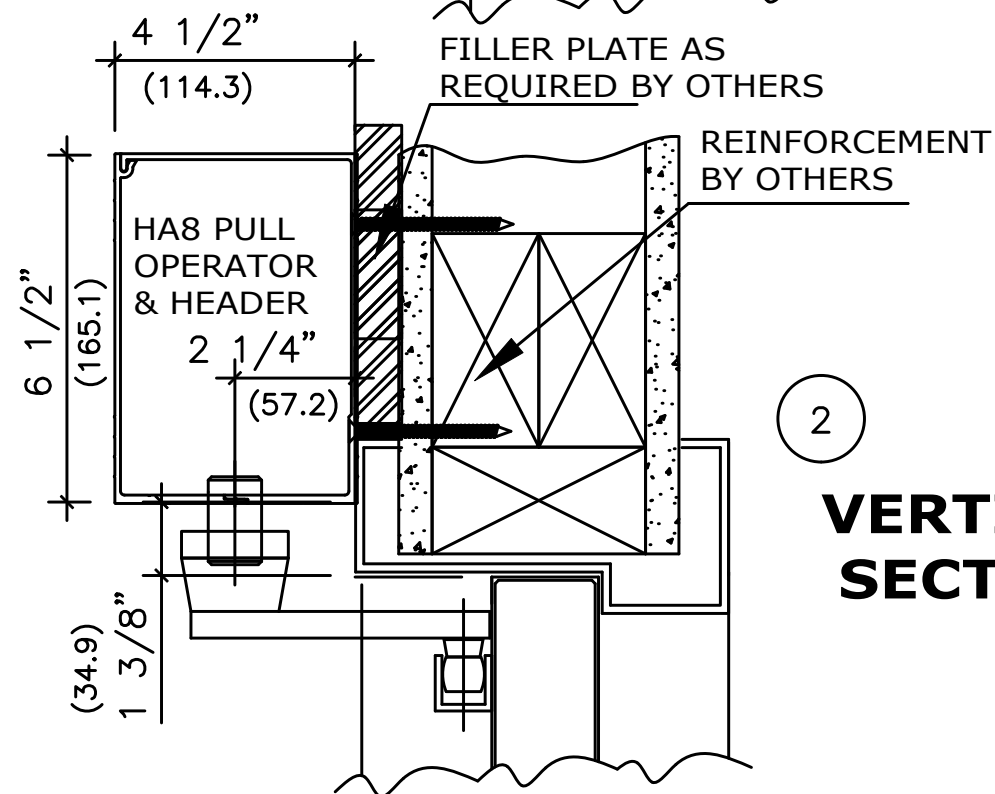

2

VERTICAL SECTION

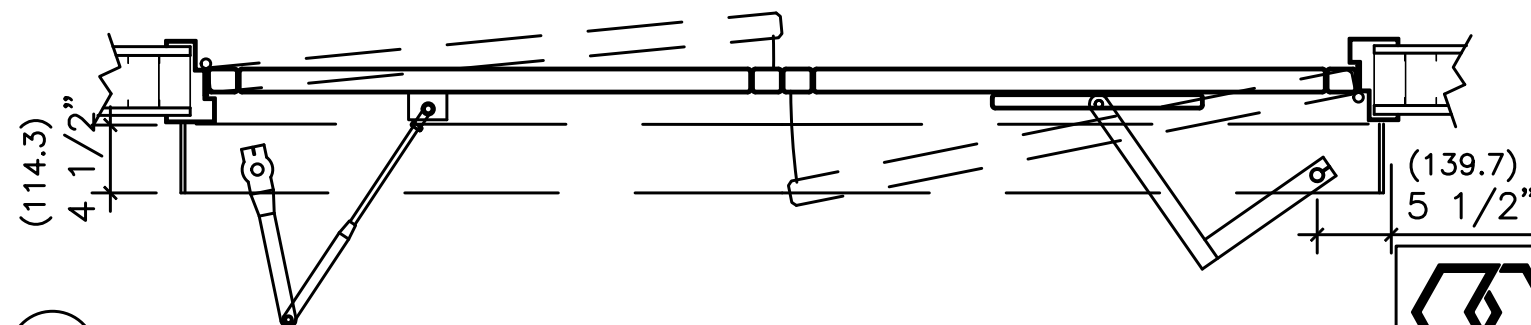


3 HORIZONTAL SECTION

APPLICATION:
LOW ENERGY OPERATOR
DUAL EGRESS LEFT HAND

NOTE: DRAWING IS DIMENSIONED IN BOTH INCHES & METRIC (mm)
AUTOMATIC SWING DOOR OPERATOR SHALL BE "FA8" CETL USA
APPROVED, CONFORMING TO UL STD. 325 & ANSI-BHMA STD. A156.19
FIRE RATED TO UL STD. 10(B); UL STD. 10(C), CERTIFIED TO CAN.
CSA STD. C22.2#247 AS MANUFACTURED BY RECORDED-USA.
32" (813) CLEAR OPENING REQUIRED TO MEET ADA REQUIREMENT.

STANDARD FINISH: ANODIZED, CLEAR; DARK BRONZE;
SPECIAL FINISHES ARE AVAILABLE

120V AC. 60HZ. 15A.
BY ELEC. CONTRACTOR.

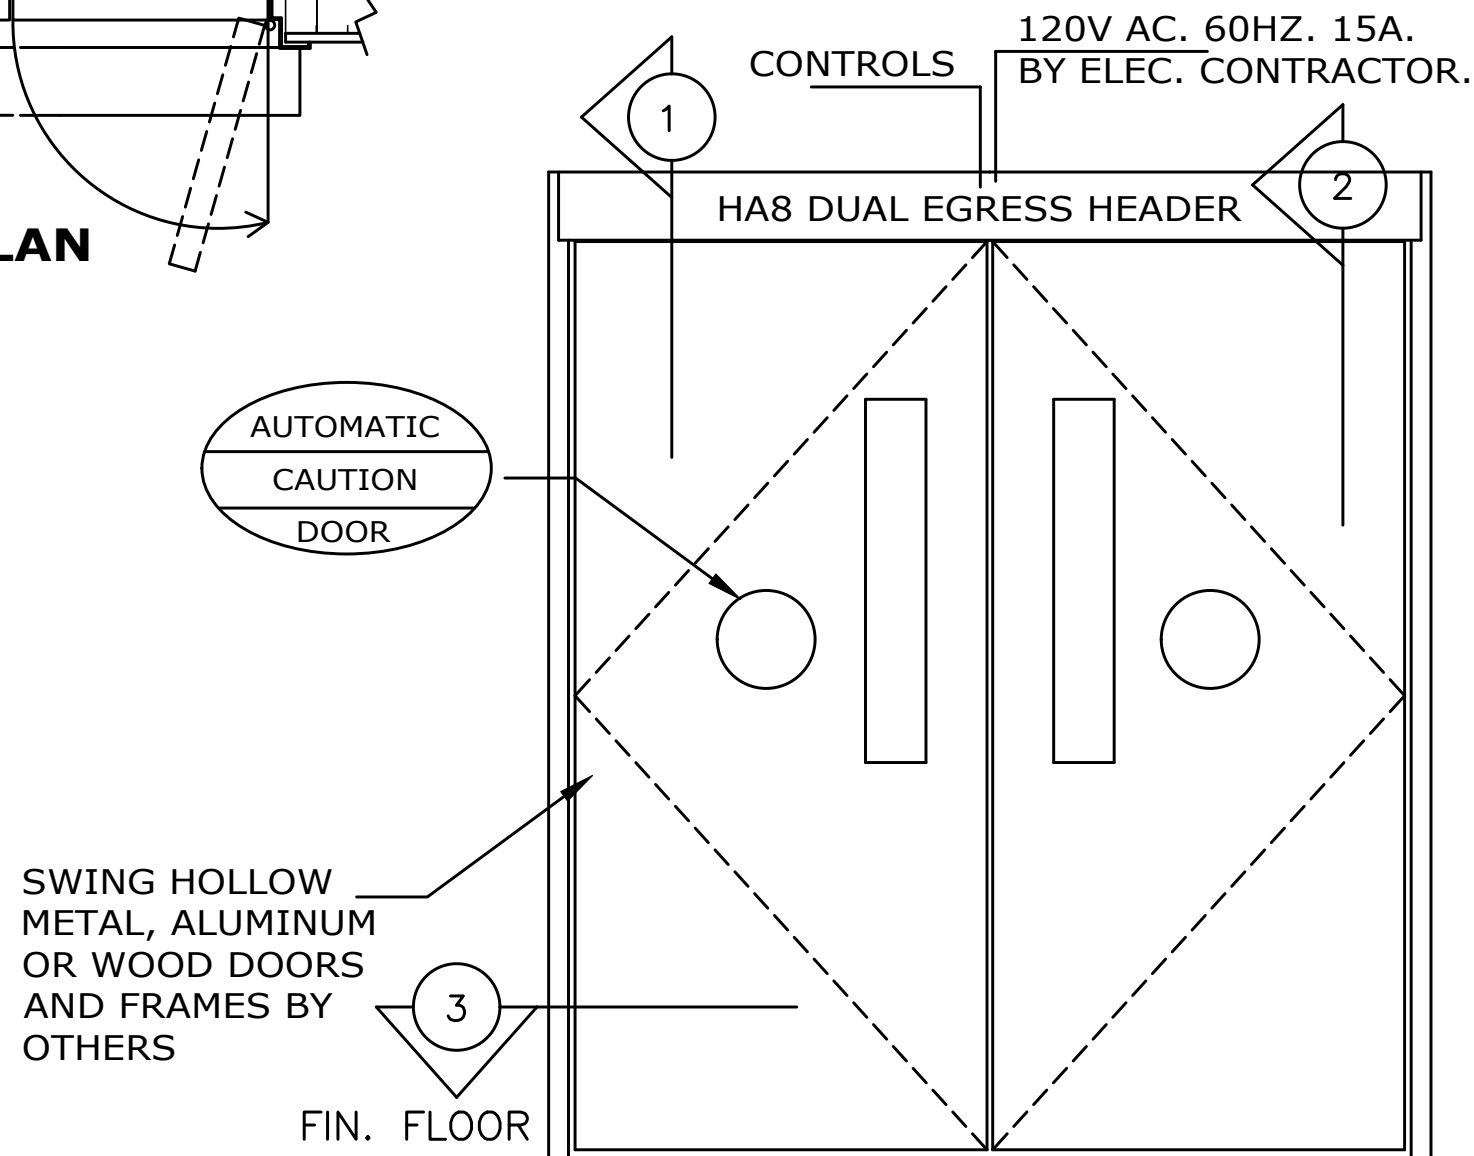

ELEVATION



TEL. 877-348-6837 (CANADA)
TEL. 833-921-1337 (USA)
www.recorddoors.com

JOB NAME:

LOCATION:

DOOR NUMBER:

SHEET NO.

14

SECTION

HA