



APPLICATION:
LOW ENERGY OPERATOR
BOTTOM LOAD UNITS

NOTE: DRAWING IS DIMENSIONED IN BOTH INCHES & METRIC (mm)
AUTOMATIC SWING DOOR OPERATOR SHALL BE "FA8" CETL USA
APPROVED, CONFORMING TO UL STD. 325 & ANSI-BHMA STD. A156.19
FIRE RATED TO UL STD. 10(B); UL STD. 10(C), CERTIFIED TO CAN.
CSA STD. C22.2#247 AS MANUFACTURED BY RECORDED-USA.
32" (813) CLEAR OPENING REQUIRED TO MEET ADA REQUIREMENT.




STANDARD FINISH: ANODIZED, CLEAR; DARK BRONZE;
SPECIAL FINISHES ARE AVAILABLE

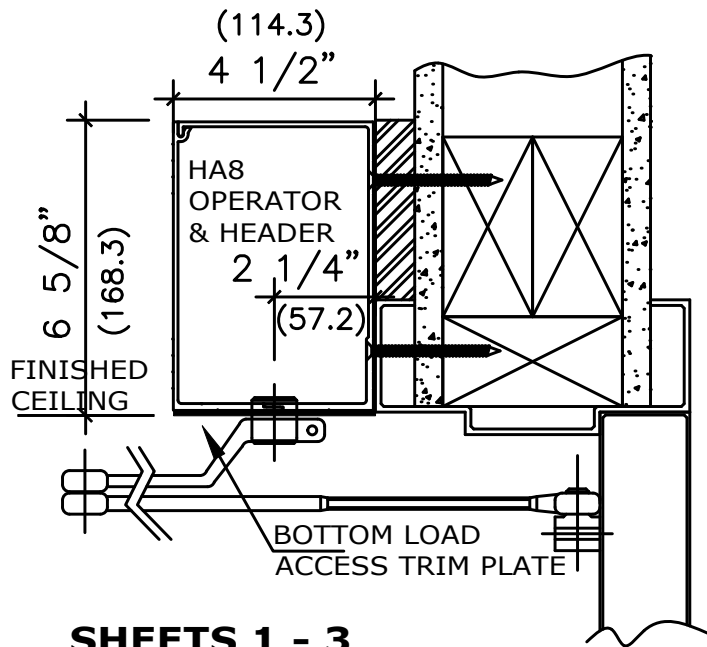


SHEETS 1 - 3

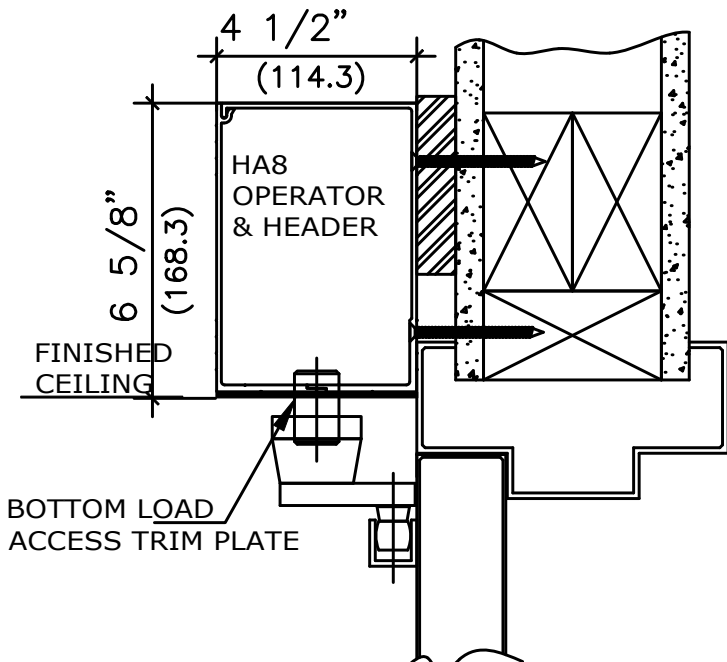


SHEETS 4 - 6

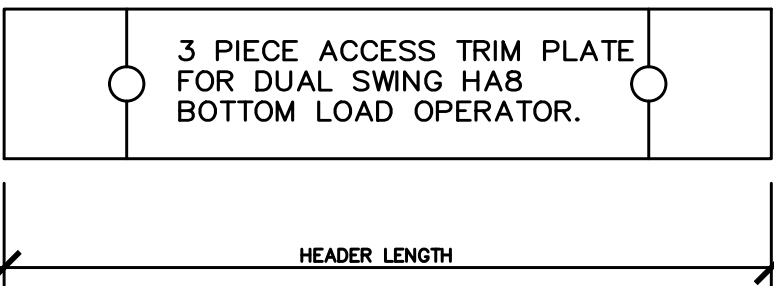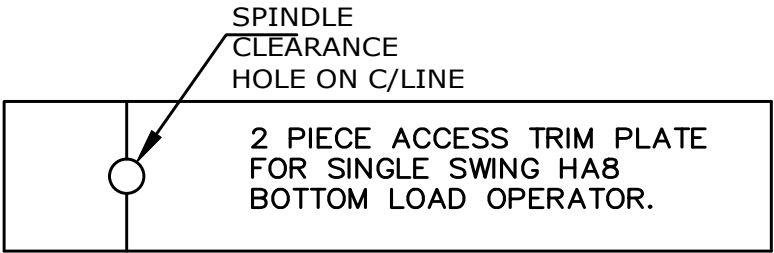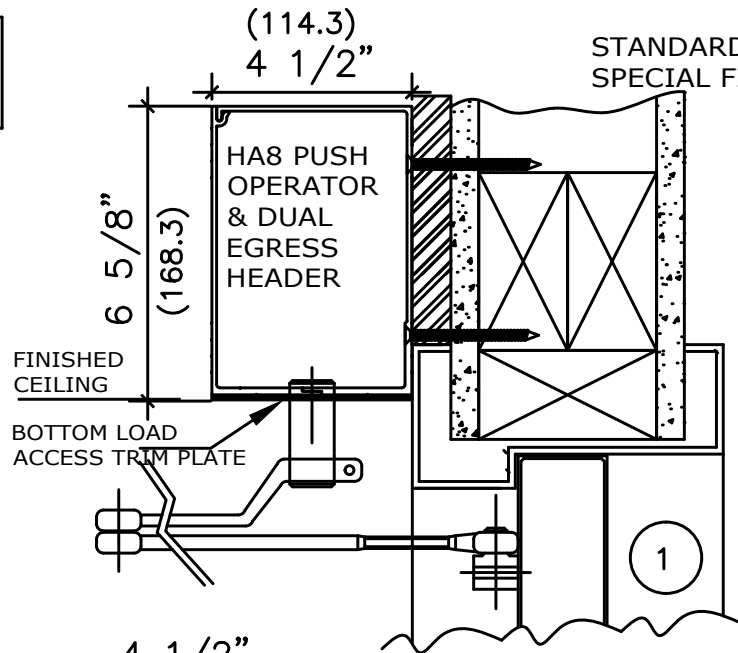


NOTE:
REFER TO RELATIVE SHEETS
(1-14) FOR SPECIFIC HA8
APPLICATION GUIDELINES.

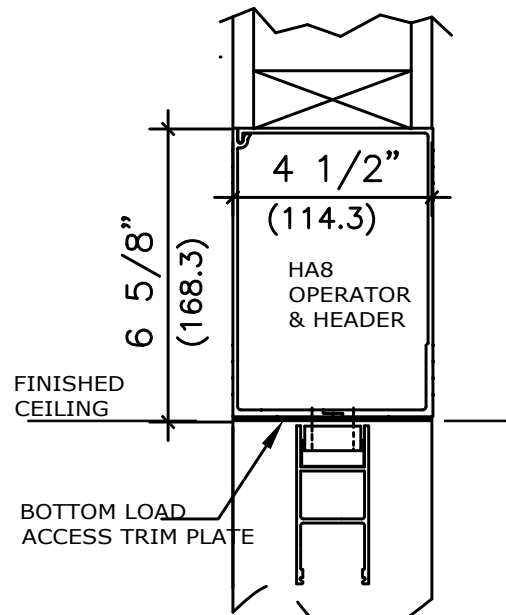

SHEETS 7 - 9

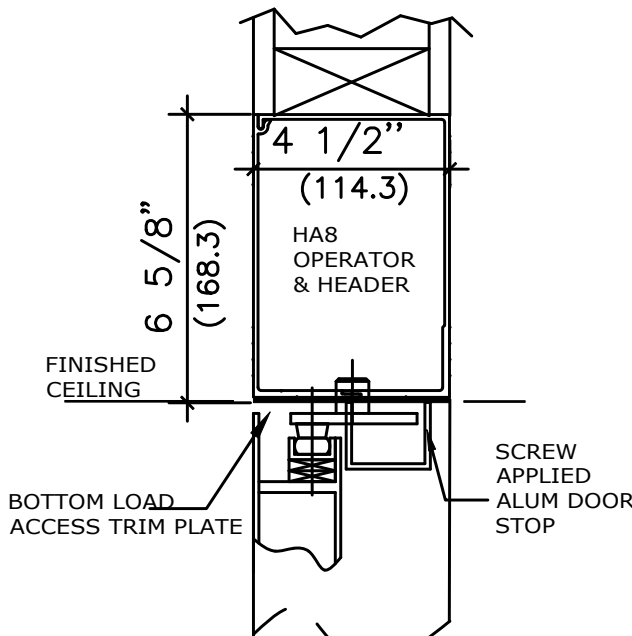

SHEETS 10 - 12

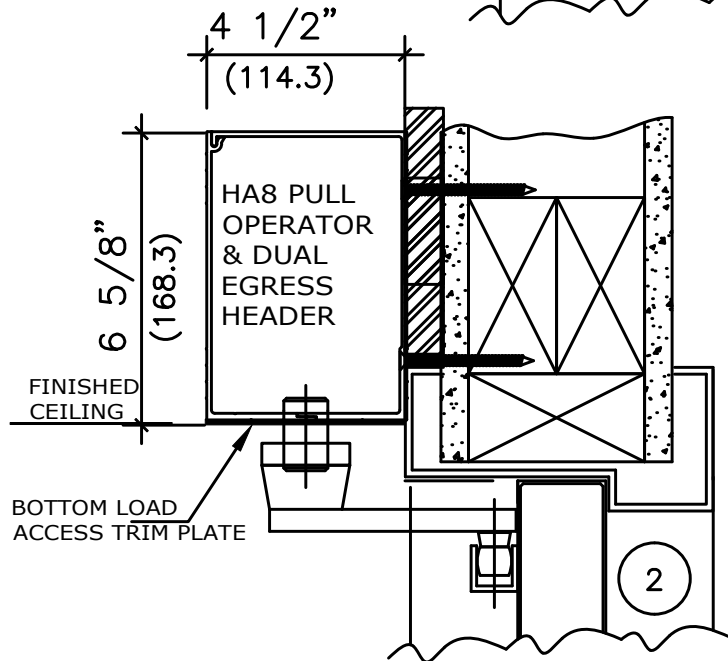

SHEETS 13 - 14



TEL. 877-348-6837 (CANADA)
TEL. 833-921-1337 (USA)
www.recorddoors.com

JOB NAME:	15	SHEET NO.
LOCATION:		SECTION
DOOR NUMBER:	HA	