



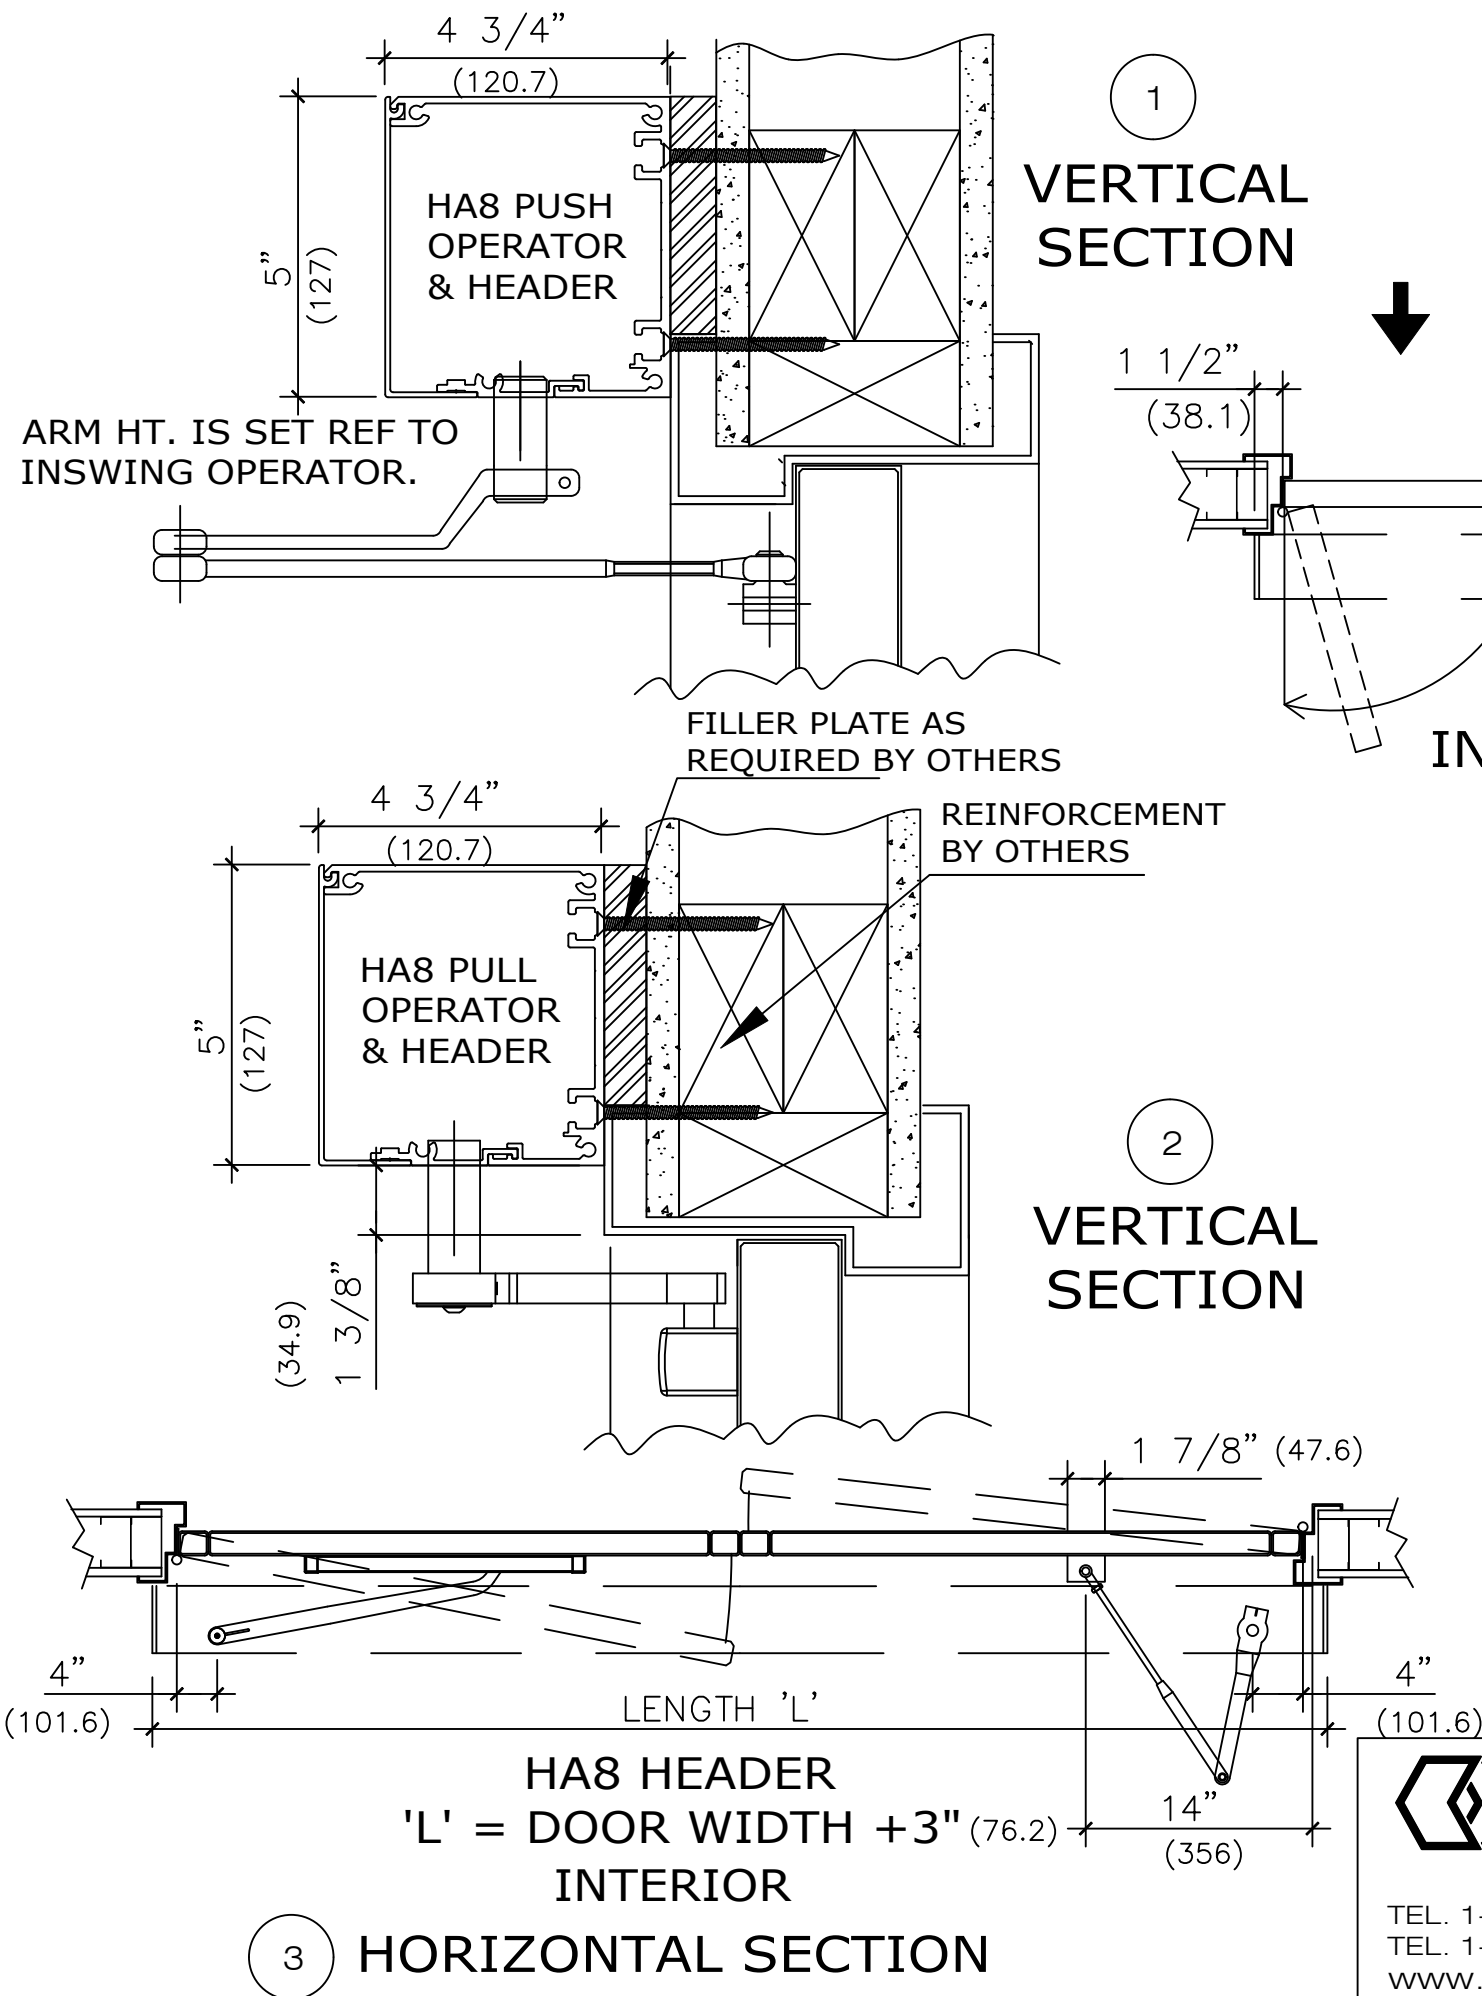

APPLICATION:
LOW ENERGY OPERATOR
DUAL EGRESS RIGHT HAND

NOTE: DRAWING IS DIMENSIONED IN BOTH INCHES & METRIC (mm)
 AUTOMATIC SWING DOOR OPERATOR SHALL BE CETL USA APPROVED,
 CONFORMING TO UL STD. 325 & ANSI-BHMA STD. A156.19 FIRE
 RATED TO UL STD. 10(B); UL STD. 10(C), CERTIFIED TO CAN. CSA
 STD. C22.2#247 AS MANUFACTURED BY RECORD-USA.
 32" (813) CLEAR OPENING REQUIRED TO MEET ADA REQUIREMENT.

STANDARD FINISH: ANODIZED, CLEAR; DARK BRONZE;
 SPECIAL FINISHES ARE AVAILABLE
 120V AC. 60HZ. 15A.
 BY ELEC. CONTRACTOR.

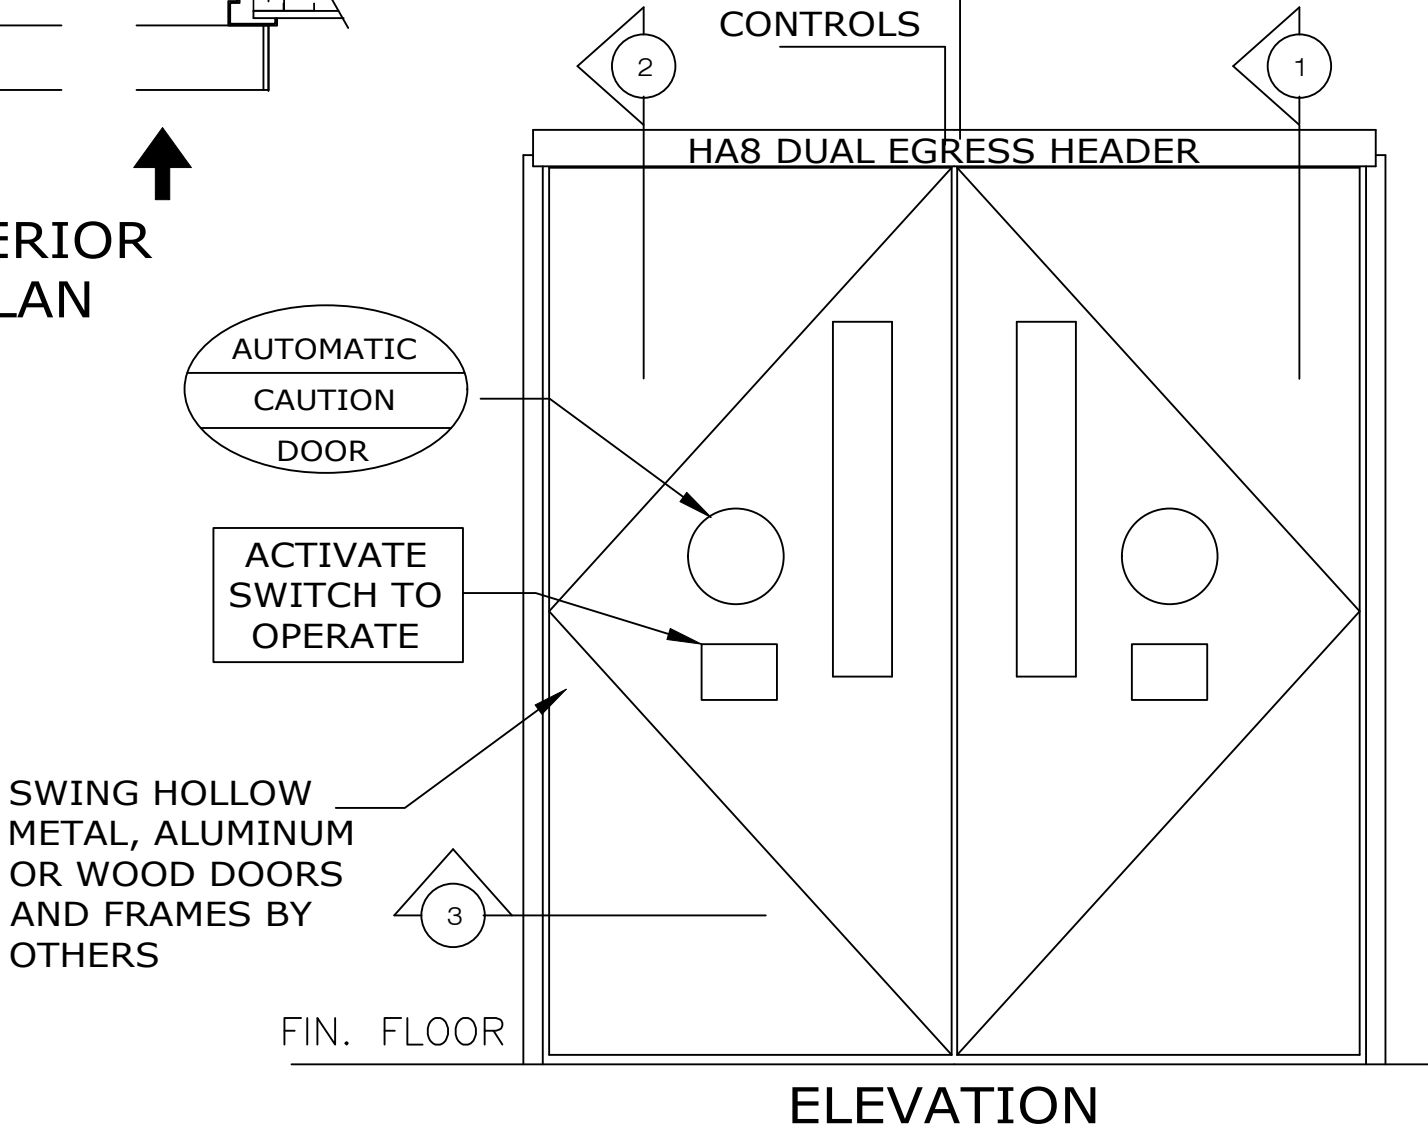

TEL. 1-877-348-6837 (CANADA)
 TEL. 1-800-438-1937 (USA)
 www.recorddoors.com

JOB NAME:	SECTION HA8
LOCATION:	
DOOR NUMBER:	
DRAWING NUMBER: ACH-1686837	