
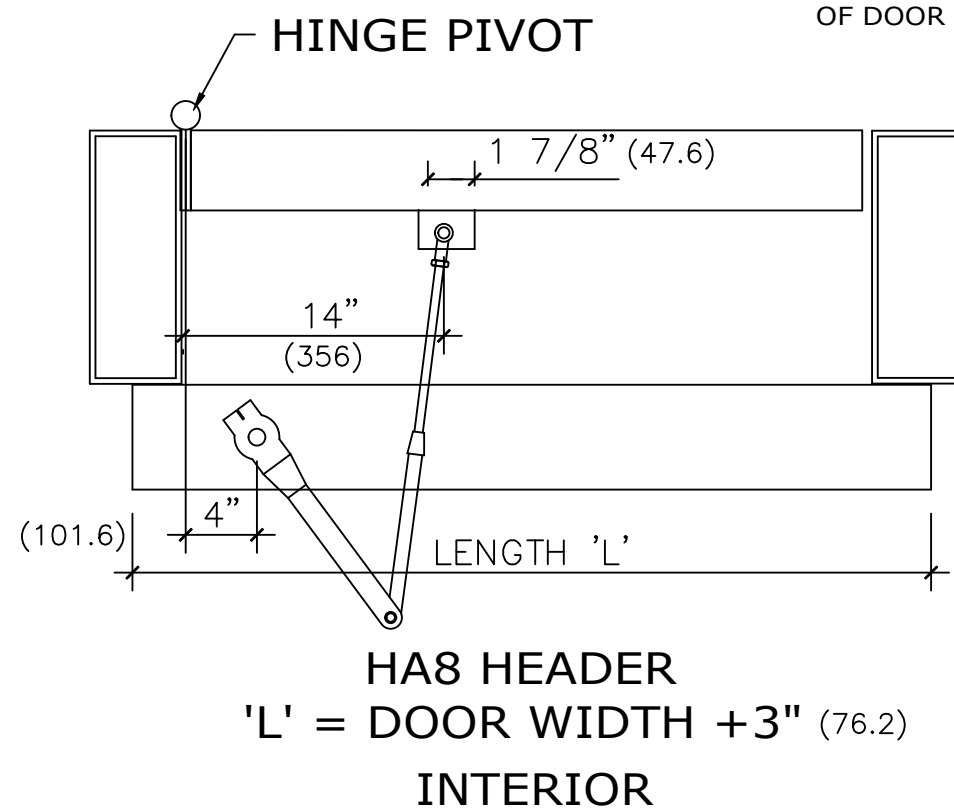
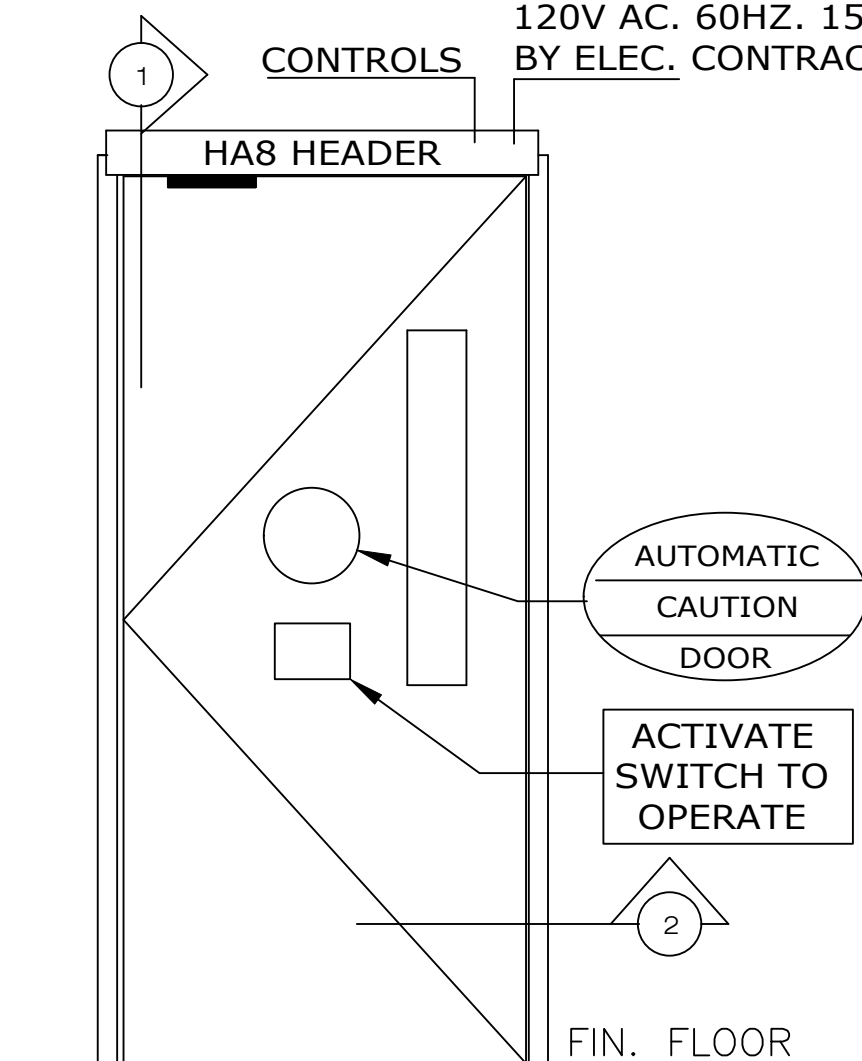
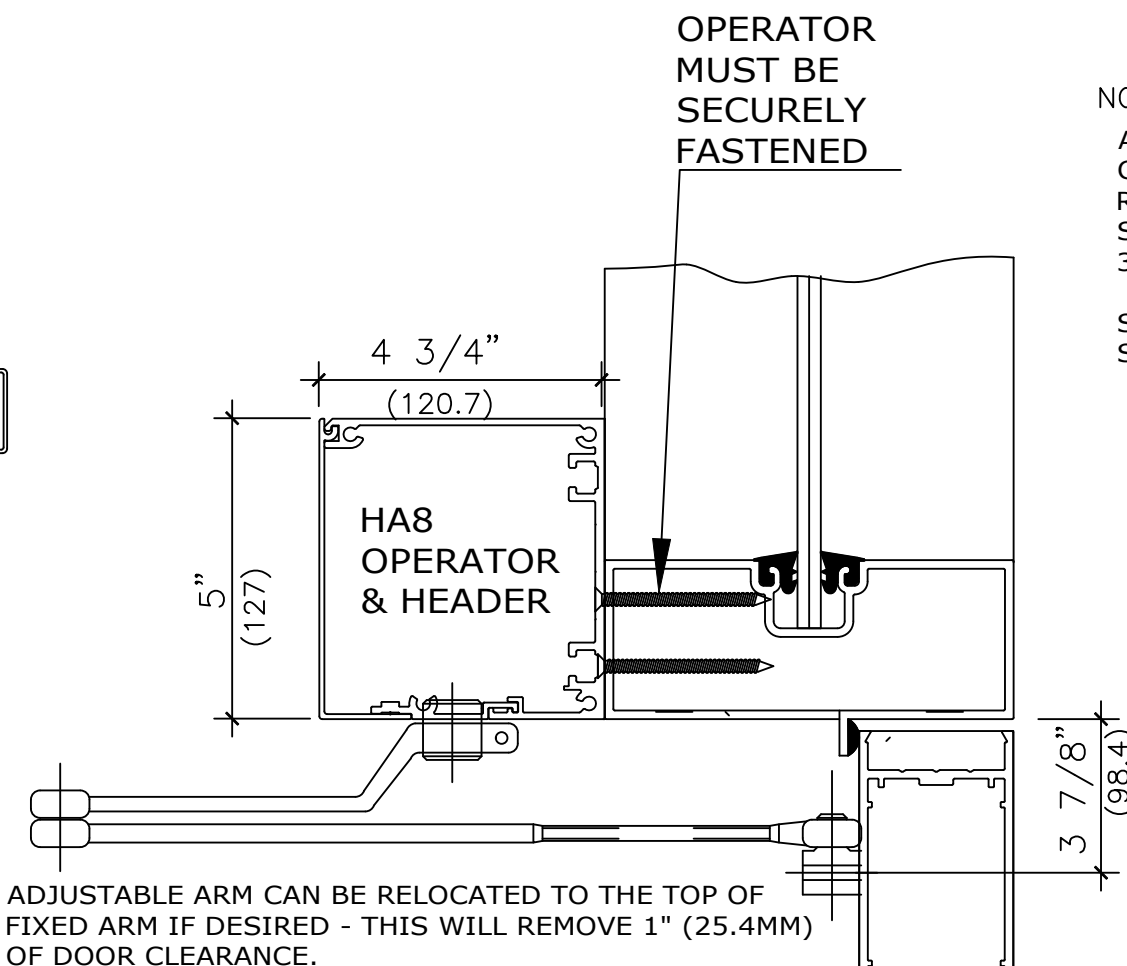


APPLICATION:
LOW ENERGY OPERATOR
LEFT HAND PUSH
ALUMINUM STOREFRONT

NOTE: DRAWING IS DIMENSIONED IN BOTH INCHES & METRIC (mm)
AUTOMATIC SWING DOOR OPERATOR SHALL BE CETL USA APPROVED,
CONFORMING TO UL STD. 325 & ANSI-BHMA STD. A156.19 FIRE
RATED TO UL STD. 10(B); UL STD. 10(C), CERTIFIED TO CAN. CSA
STD. C22.2#247 AS MANUFACTURED BY RECORD-USA.
32" (813) CLEAR OPENING REQUIRED TO MEET ADA REQUIREMENT.

STANDARD FINISH: ANODIZED, CLEAR; DARK BRONZE;
SPECIAL FINISHES ARE AVAILABLE

120V AC. 60HZ. 15A.
BY ELEC. CONTRACTOR.

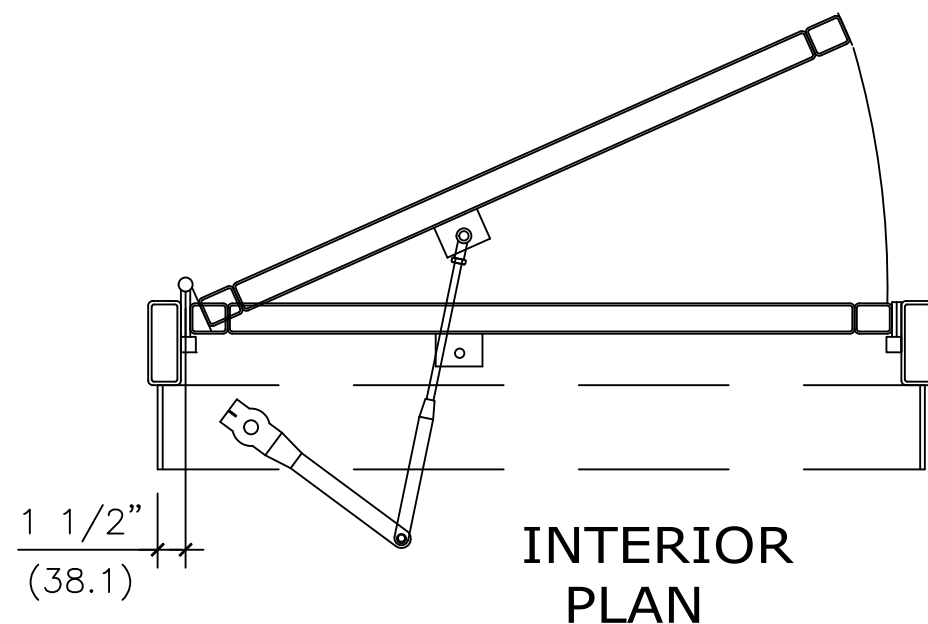

2 HORIZONTAL SECTION



TEL. 1-877-348-6837 (CANADA)
TEL. 1-800-438-1937 (USA)
www.recorddoors.com

JOB NAME:	
LOCATION:	
DOOR NUMBER:	
DRAWING NUMBER:	
ACH-1686843	
SECTION	HA8