



APPLICATION:
LOW ENERGY OPERATOR
LEFT HAND PUSH


NOTE: DRAWING IS DIMENSIONED IN BOTH INCHES & METRIC (mm)
AUTOMATIC SWING DOOR OPERATOR SHALL BE CETL USA APPROVED, CONFORMING TO UL STD. 325 & ANSI-BHMA STD. A156.19 FIRE RATED TO UL STD. 10(B); UL STD. 10(C), CERTIFIED TO CAN. CSA STD. C22.2#247 AS MANUFACTURED BY RECORD-USA.
32" (813) CLEAR OPENING REQUIRED TO MEET ADA REQUIREMENT.
STANDARD FINISH: ANODIZED, CLEAR; DARK BRONZE; SPECIAL FINISHES ARE AVAILABLE

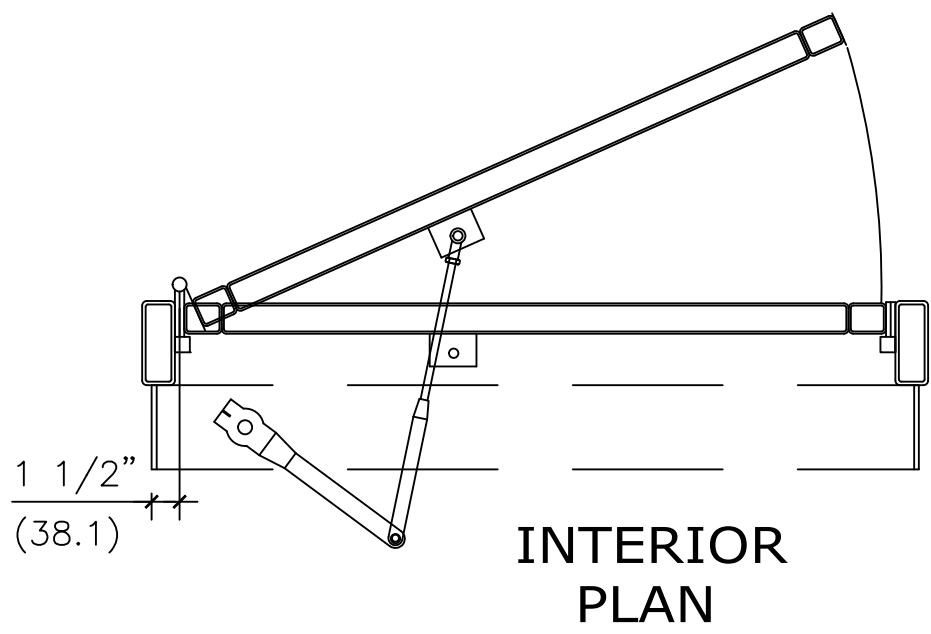

INTERIOR PLAN

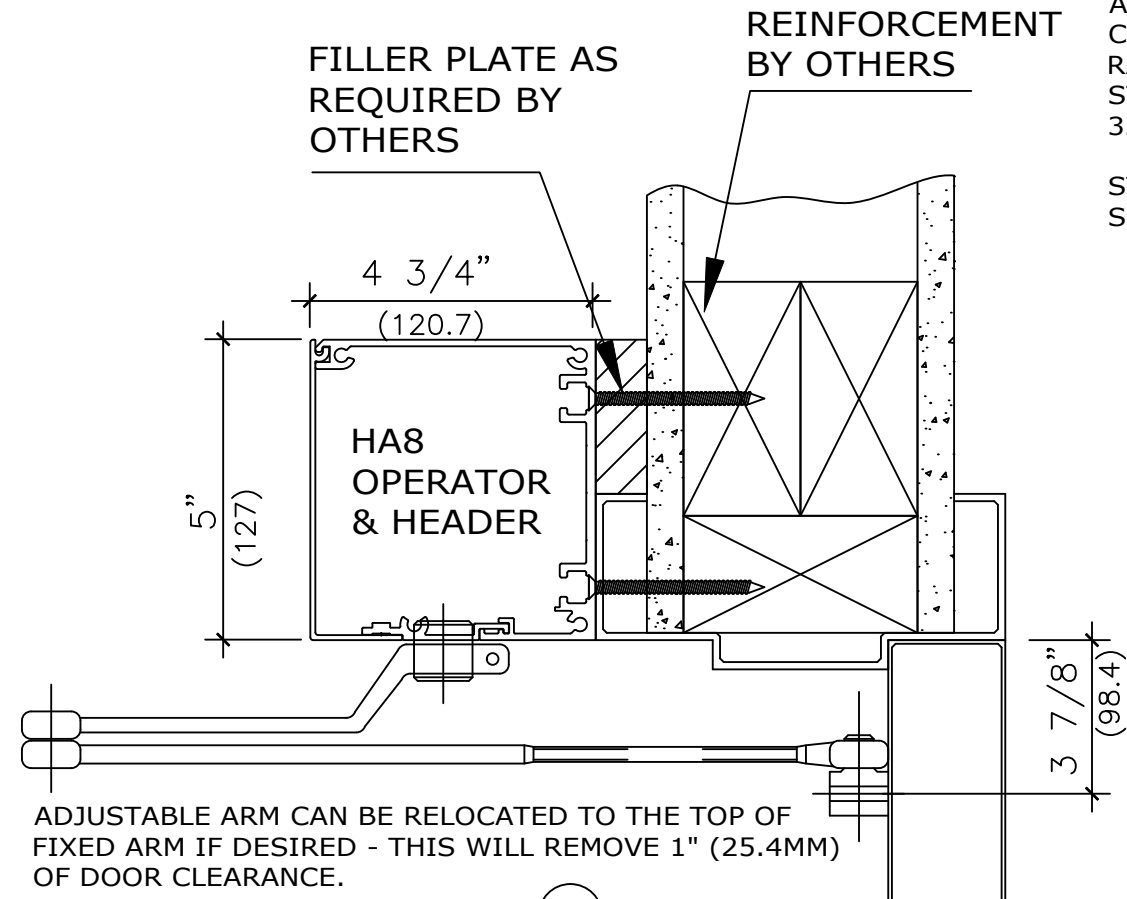


VERTICAL SECTION

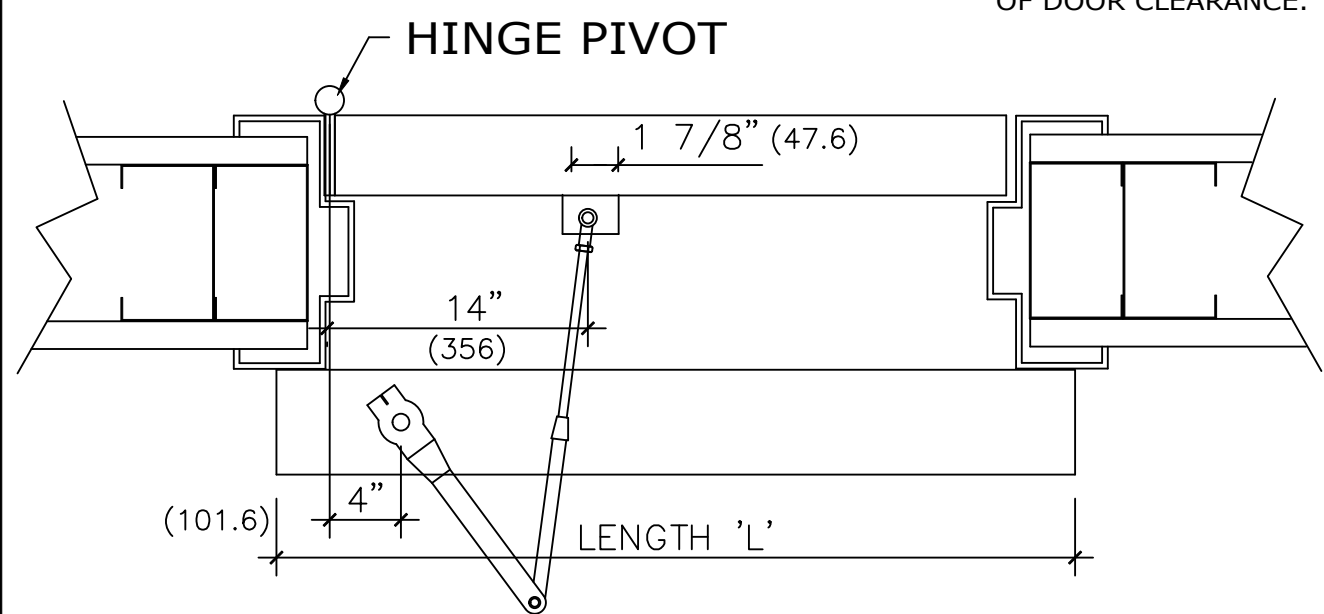

HA8 HEADER
'L' = DOOR WIDTH + 3" (76.2)
INTERIOR

HORIZONTAL SECTION

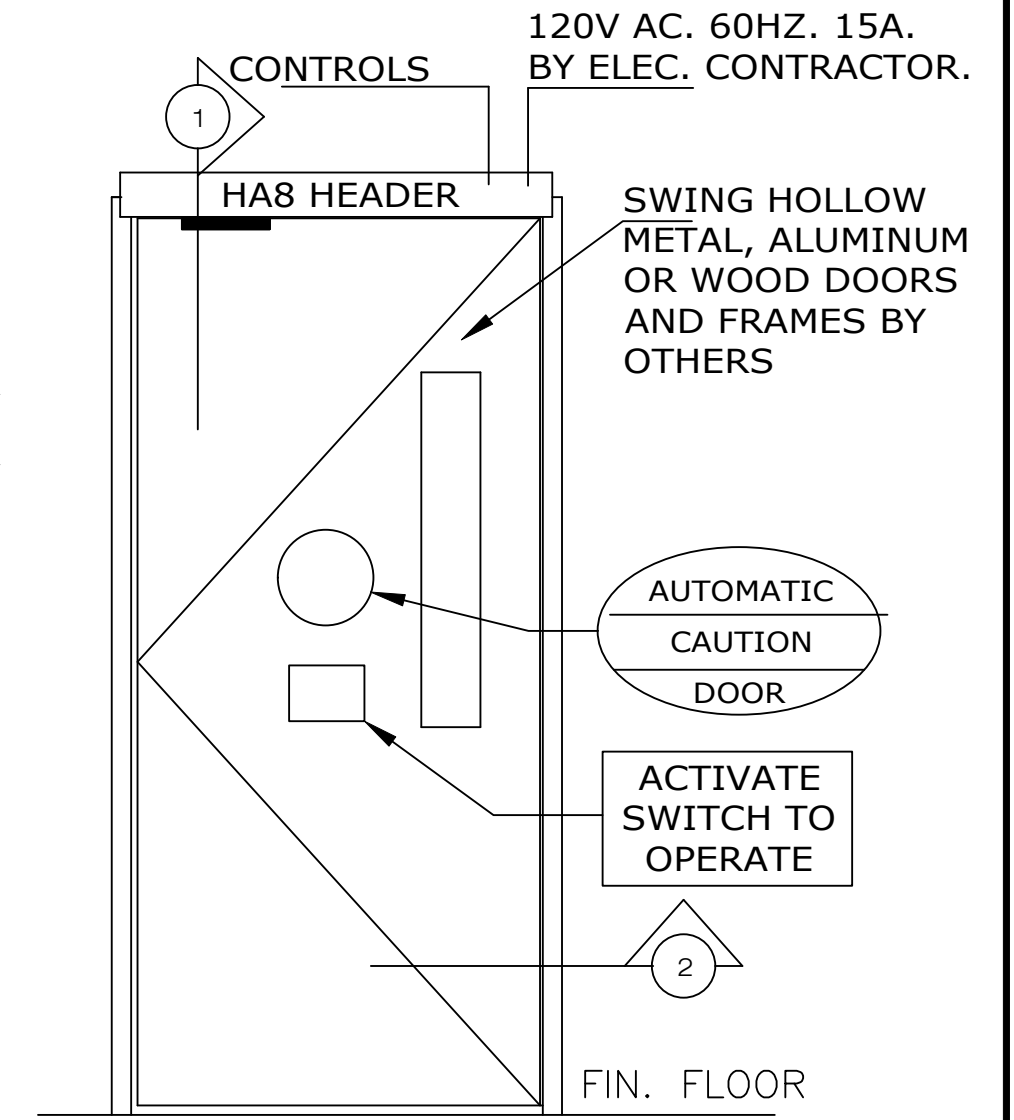

ELEVATION



TEL. 1-877-348-6837 (CANADA)
TEL. 1-800-438-1937 (USA)
www.recorddoors.com

JOB NAME:	
LOCATION:	
DOOR NUMBER:	
DRAWING NUMBER:	SECTION
ACH-1686842	HA8