


APPLICATION:
LOW ENERGY OPERATOR
RIGHT HAND PUSH
ALUMINUM STOREFRONT


NOTE: DRAWING IS DIMENSIONED IN BOTH INCHES & METRIC (mm)
AUTOMATIC SWING DOOR OPERATOR SHALL BE CETL USA APPROVED,
CONFORMING TO UL STD. 325 & ANSI-BHMA STD. A156.19 FIRE
RATED TO UL STD. 10(B); UL STD. 10(C), CERTIFIED TO CAN. CSA
STD. C22.2#247 AS MANUFACTURED BY RECORD-USA.
32" (813) CLEAR OPENING REQUIRED TO MEET ADA REQUIREMENT.

STANDARD FINISH: ANODIZED, CLEAR; DARK BRONZE;
SPECIAL FINISHES ARE AVAILABLE

120V AC. 60HZ. 15A.
BY ELEC. CONTRACTOR.

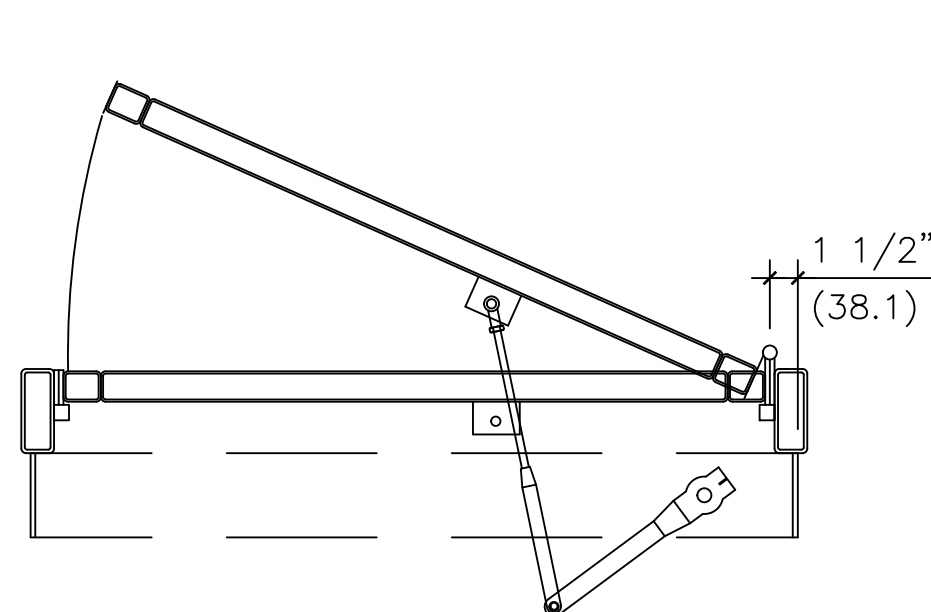


INTERIOR
PLAN

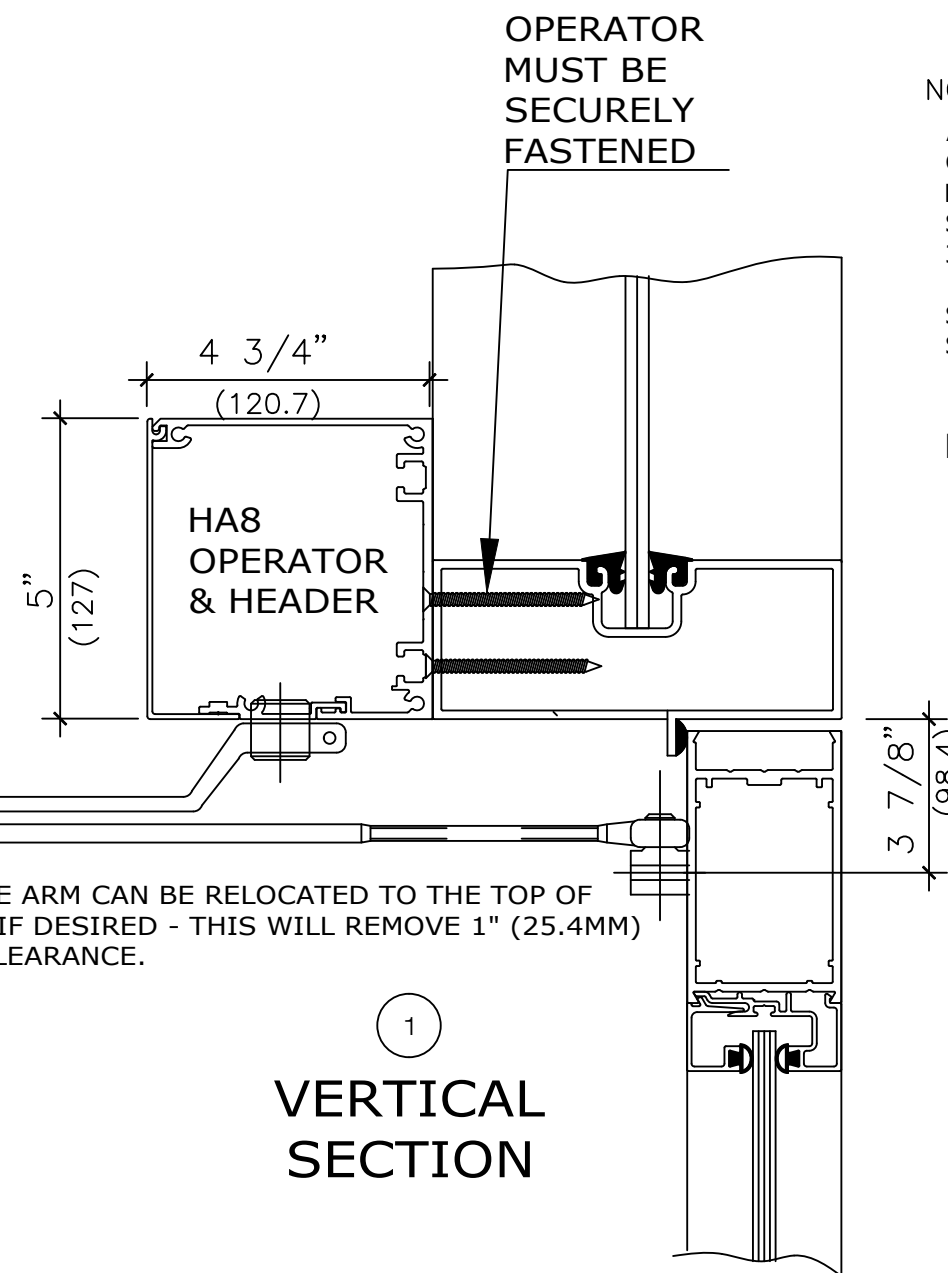


VERTICAL
SECTION

ADJUSTABLE ARM CAN BE RELOCATED TO THE TOP OF
FIXED ARM IF DESIRED - THIS WILL REMOVE 1" (25.4MM)
OF DOOR CLEARANCE.

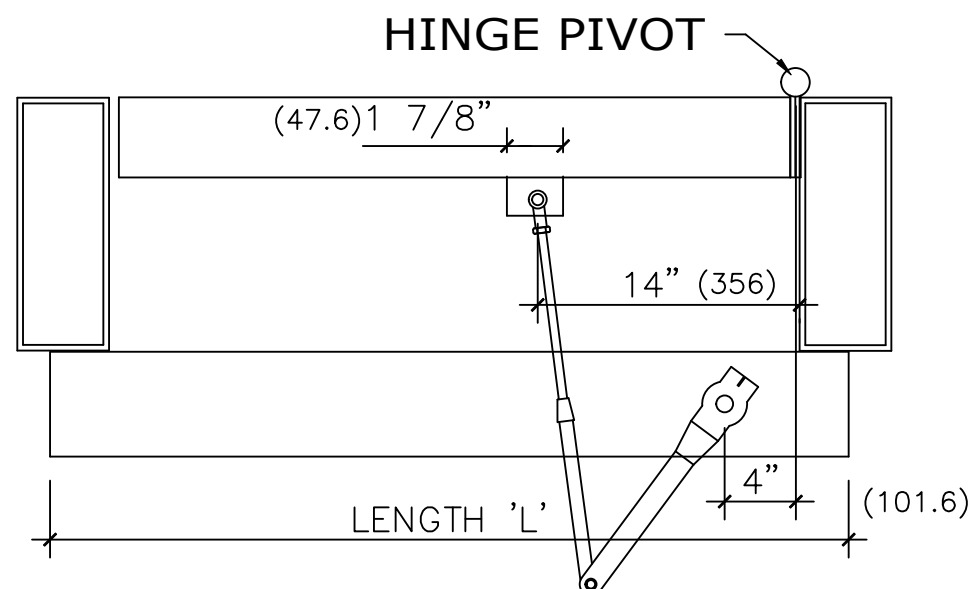

HA8 HEADER
'L' = DOOR WIDTH + 3" (76.2)
INTERIOR

HORIZONTAL SECTION

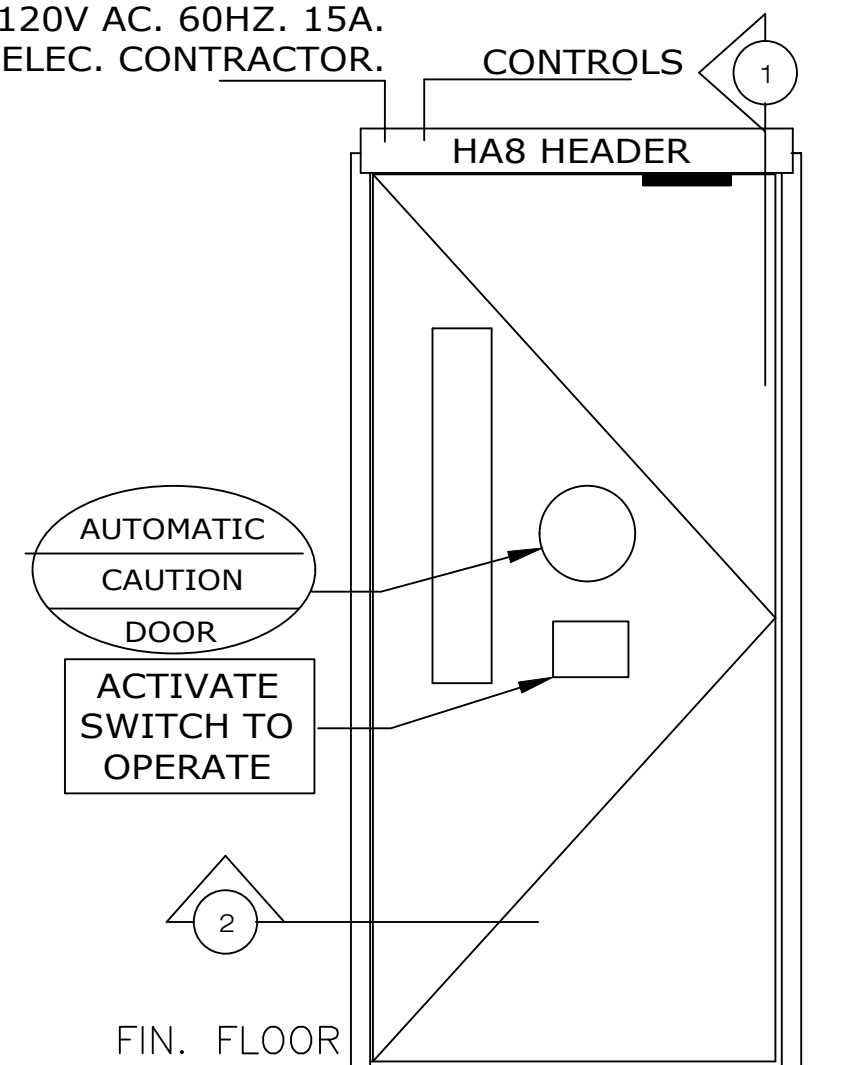

ELEVATION



TEL. 1-877-348-6837 (CANADA)
TEL. 1-800-438-1937 (USA)
www.recorddoors.com

JOB NAME:		SECTION HA8
LOCATION:		
DOOR NUMBER:		
DRAWING NUMBER: ACH-1686845		