



HA8

Low Energy Swing Operator

The Record HA8 delivers proven performance, reliability, and simplicity in a cost-effective swing door operator.

A non-handed operator, the HA8 simplifies installation and reduces inventory requirements by eliminating the need to specify left or right handed units.

Built for moderate to high-traffic applications, the HA8 focuses on what matters most, durability and consistent operation, without unnecessary complexity. Precision-engineered internal components ensure smooth, dependable performance over the long term.

A practical, commercial-grade solution, the HA8 is ideal for facilities that need reliable door automation without added features or cost.

Available in a variety of finishes—including clear, dark bronze, and black—the HA8 supports single, pair, and dual egress configurations. It is also available as part of the popular EZ36 Kit, providing everything you need to automate a standard 36" door in one package.

Complies with the following standards.

ANSI/BHMA A156.19, NFPA 101, UL325, UL10B, UL10C.

Product features

Quiet Operation

Maintenance free

High precision gears made for sustained long-term use

Plug-n-Play design for fast trouble free installation


On-board programming

Built in strike/mag lock relay - fail safe or fail secure


Separate inputs for activation and safety devices

Built to outlast the competition

HA8 Profile

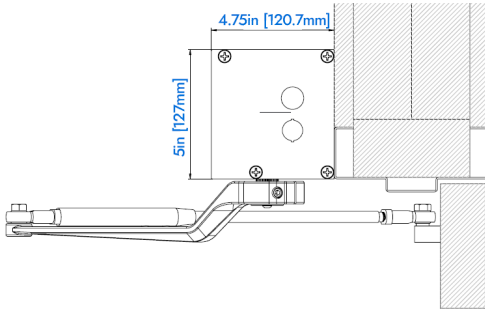

Arms

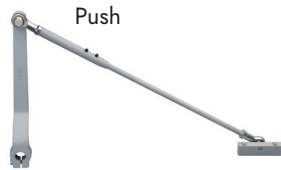

Technical Specs/Data

Header Size	4.75" x 5" (120.7mm x 127mm)
Motor Type	Electro-Mechanical
Drive Train Gear Box	Aluminum-Alloy Gearbox
Control Box	Single HA8 w/ data, 24 VDC, 3 AMP
Operating Voltage (standard)	115VAC
Gear Grease	High Wear Protection
Bearings	HD Sealed
Arm Connection	1" Solid Spline Spindle
On/Off/Hold Open Switch	Yes
Adjustable Stop	Yes
Adjustable Spring Tension	Yes
Mechanical Clutch	Standard
OBP (On-Board Power Supply)	Yes, 24V for accessories
Electric Strike Power	Yes, 24 VDC
Circuit Protection	3 amp fuse
Side Loading	Yes
Manual Opening/Closing Force	Adjustable 5 to 30 lbs.
Push Reveal	Up to 14"
Pull Reveal	Up to 2 3/8"

Technical data subject to change without notice.

Standard Features:


- » Surface Mounted
- » Non-handed
- » Push or Pull
- » Single, Pair Doors or Dual Egress
- » Clear, Dark Bronze or Black
- » Available as a EZ36 kit



ADA



low energy



push or pull



fire rated



UL325



24 VDC