



Record FTA 20

Create wide entrances in limited spaces

The FTA 20 folding door is excellent for limited spaces, where the use of sliding doors is prohibited, as it maximises the clear opening width. The FTA 20 FBO shares all the same features but can also be used on escape routes, thanks to its optional break-out function.

Applications

Suitable for narrow passageways and entrances in restaurants, kitchens, airports, offices, hospitals, care homes, educational establishments and leisure facilities. Especially suitable as entrance doors in windy conditions.

Key benefits


Record FTA 20

- » Ideal for entrances with limited space, the width of the passage can almost be fully retained
- » These space-saving doors fold inwards negating the need for added room around an entrance
- » Can be easily retrofitted to save valuable time and money on installation
- » Excellent for windy environments, as doors remain easy to open and close
- » Designed to work well when fitted into corridors or to section off areas such as the kitchen to the dining room in a restaurant
- » Reliable and robust, easier to maintain and service
- » Aesthetically pleasing and compliments all architectural designs

Record FTA 20 FBO


Features all the benefits of the standard FTA 20 as well as...

- » Provides an escape or exit route in narrower or restricted spaces in an emergency
- » Simply and easy to open — access to escape routes is provided by light pressure on the door panels
- » Door panels open in the direction of escape, enabling users to exit as quickly as possible



Emergency exit function

In emergencies, these folding doors are operated by light pressure on the door panel freeing the track from its mountings, allowing the door panel and track to open outwards.

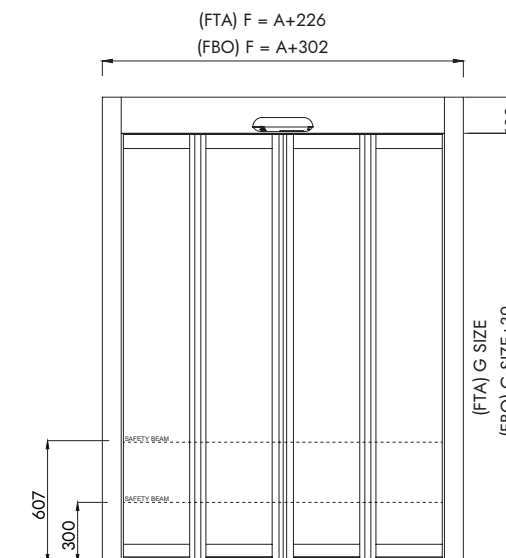


Key features

- » Can be used as one-sided or two-sided units, depending on the total width available
- » Hinged doors available in various dimensions
- » Doors can be retrofitted into the wall
- » For FTA 20 FBO — doors open outwards
- » Controllable parameters such as speed and opening time
- » Easily programmable
- » Aluminium frame and cover available in anodised and powdercoat colours
- » Radar/infrared detectors, switches and swipe card available

Basic functions


- » Automatic operation
- » One-way traffic
- » Continuously open
- » Manual Control
- » Interlock function
- » Operating lock
- » Automatic reverse

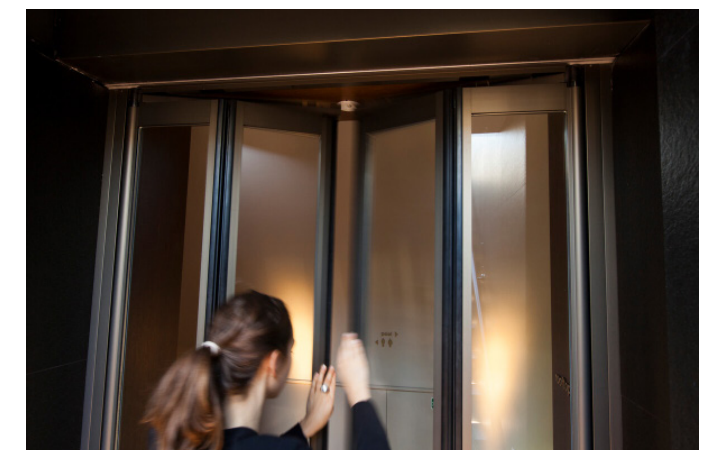



Operators available

- » Single Bifold - In-line
- » Single Bifold - Faced Fixed
- » Double Bifold - In-line
- » Double Bifold - Faced Fixed
- » Electric Lock

Face fixed

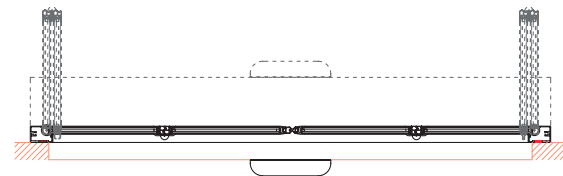

In Line Fixed

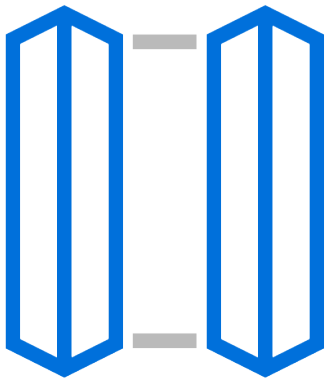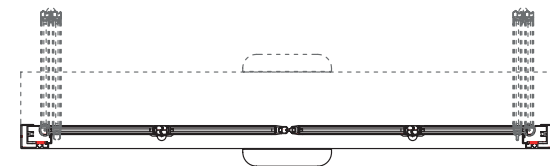

Create a wide opening with limited space

These space saving doors negate the need for added room around the entrance meaning they are suitable for areas with limited space.

Recommended application limits:
Folding sliding door

Door type:	Single Folding	Double Folding
Opening width:	800-1200 mm	800-2000 mm
Clear passage height:	2500 mm	2500 mm
Max. door weight:	2 x 37.5kg	4 x 37.5kg
Recommended application:	2 leaf door	4 leaf (bi parting)

Technical specifications

Door operating speed:	up to 0.7m/s (adjustable)
Operating housing dimension	D x H: 240 x 180 mm
Power supply:	230 V AC / 50 / 60 Hz
Power consumption:	100 W max, 20 W idle mode
Ambient temperature:	- 15 °C to + 50 °C

Increased resistance to strong wind

The FTA 20 provides the perfect solution for areas that experience harsh wind such on the coast, with door leaves that remain easy to operate and resist damage.

Compatible with fire alarm systems

In case of fire, a signal from the smoke and heat detector or fire alarm system triggers immediate closing of the passage.

Various modes of operation

Including automatic, one-way traffic, continuously open, manual control and interlock function.

Over 200 standard RAL colours available

With over 200 colours available we can match the surrounding colours of almost any façade and ensure that entrances designed to convey a brand are not



Accessories

BDE-D Electronic Control Unit

A convenient and user-friendly remote control unit for the intuitive control and programming of doors with Record operators.

Record BLS 60 Touchless Switch

This switch ensures hygienic use by automatically opening the door as you approach, eliminating the need for any hand contact.



For more information

Speak to our sales team

