



record-usa


4324 PHIL HARGETT CT.,
MONROE, NC 28110
704-289-9212

JOB NAME: _____

LOCATION: _____


SERIES 5100 AUTOMATIC SLIDING DOORS

TYPE: 5117-5101, SX-P/O-SX, Tandem
PAGE 51-3.51

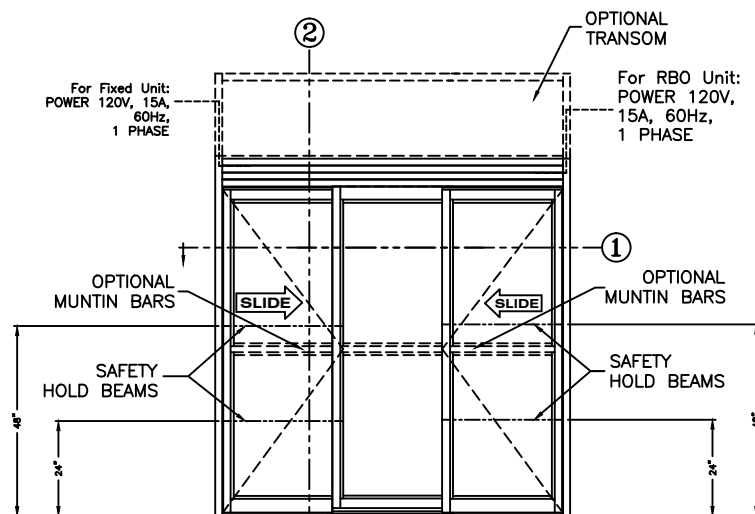


ELEVATION VIEW

SCALE: 1/4" = 1'0"

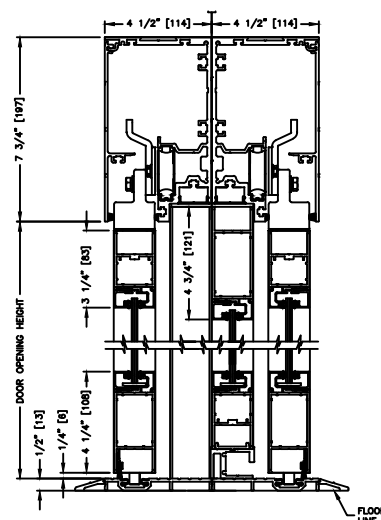

SECTION: 2


SCALE: 1/4 SIZE

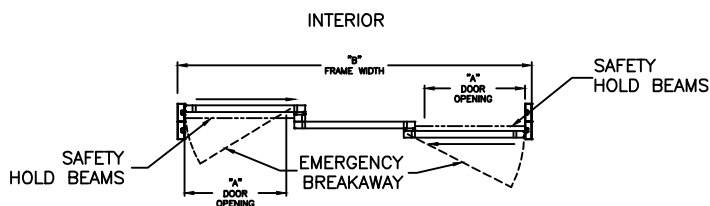

INTERIOR

PLAN VIEW

SCALE: 1/4" = 1'0"

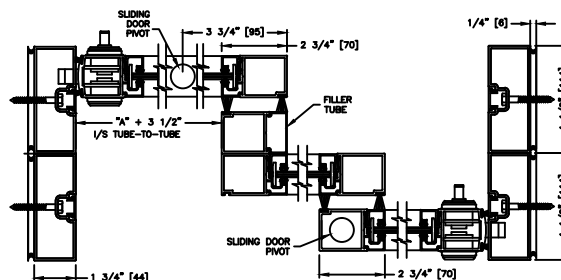

SECTION: 1

SCALE: 1/4 SIZE

NOTES:

1. See sheets 51-2.86 thru 51-2.91 for optional muntins, bottom rails, transoms, glazing variations, bottom guides & thresholds (Only available w/Pin Guide variations).
2. Door breakaway on 5116 ONLY when fully closed. Consult with local authority having jurisdiction for approved use.
3. See sheet 51-2.92 for additional details of recessed pin guide.

DIMENSIONS FOR STANDARD NARROW STILE PACKAGES

DOOR OPENING "A"	STD. PACKAGE WIDTH "B"	STD. PACKAGE HEIGHT "C" W OR W/O THRESHOLD	I/S TUBE-TO-TUBE	MAX OPENING MANUALLY (Fixed)	MAX OPENING MANUALLY (RBO)
34-1/2 (876)	120 (3048)	91 (2311)	38 (965)	38 (965)	36-1/8 (918)
38-1/2 (978)	132 (3353)	91 (2311)	42 (1067)	42 (1067)	40-1/8 (1019)
42-1/2 (1080)	144 (3658)	91 (2311)	46 (1168)	46 (1168)	44-1/8 (1121)
Masonry opening is 1/4" (6) per side larger and 1/4" taller than package dimensions. Measurements given in inches (millimeters). DOOR OPENING HEIGHT W/O THRESHOLD is 82-3/4 (2102), DOOR OPENING HEIGHT W/THRESHOLD is 83-1/4 (2115).					