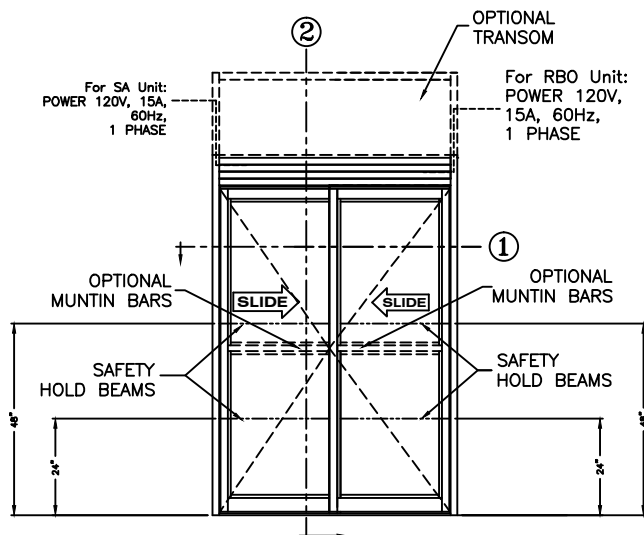


**record-usa**4324 PHIL HARGETT CT.,
MONROE, NC 28110
704-289-9212


JOB NAME: _____

LOCATION: _____

SERIES 5100 AUTOMATIC SLIDING DOORSTYPE: 5117-5107, SX-P/P-SX, Tandem
PAGE 51-3.53**ELEVATION VIEW**

SCALE: 1/4" = 1'0"

INTERIOR

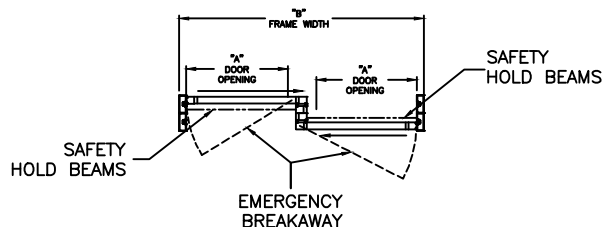


EXTERIOR

PLAN VIEW


SCALE: 1/4" = 1'0"

NOTES:

1. See sheets 51-2.86 thru 51-2.91 for optional muntins, bottom rails, transoms, glazing variations, bottom guides & thresholds (Only available w/Pin Guide variations).
2. Door breakaway on 5117 ONLY when fully closed. Consult with local authority having jurisdiction for approved use.
3. See sheet 51-2.92 for additional details of recessed pin guide.

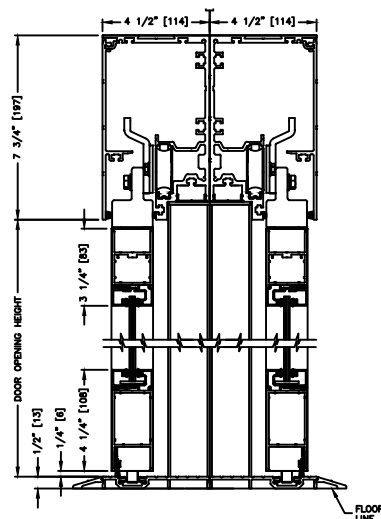**SECTION: 2**

SCALE: 1/4 SIZE

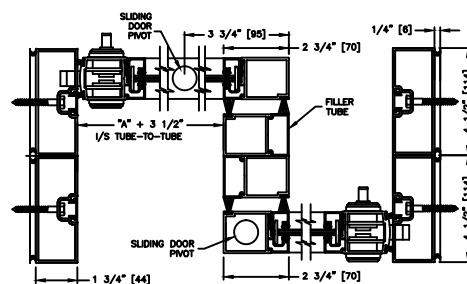**SECTION: 1**

SCALE: 1/4 SIZE

DIMENSIONS FOR STANDARD NARROW STILE PACKAGES

DOOR OPENING "A"	STD. PACKAGE WIDTH "B"	STD. PACKAGE HEIGHT "C" W OR W/O THRESHOLD	I/S TUBE-TO-TUBE	MAX OPENING MANUALLY (SA)	MAX OPENING MANUALLY (RBO)
35-3/8 (899)	84 (2134)	91 (2311)	38-7/8 (987)	38-7/8 (987)	37 (940)
41-3/8 (1051)	96 (2438)	91 (2311)	44-7/8 (1140)	44-7/8 (1140)	43 (1092)
44-3/8 (1127)	102 (2591)	91 (2311)	47-7/8 (1216)	47-7/8 (1216)	46 (1168)
47-3/8 (1203)	108 (2743)	91 (2311)	50-7/8 (1292)	50-7/8 (1292)	49 (1245)

Masonry opening is 1/4" (6) per side larger and 1/4" taller than package dimensions. Measurements given in inches (millimeters).
DOOR OPENING HEIGHT W/O THRESHOLD is 82-3/4 (2102), DOOR OPENING HEIGHT W/THRESHOLD is 83-1/4 (2115).