



record-usa




4324 PHIL HARGETT CT.
MONROE, NC 28110
704-289-9212

JOB NAME: _____

LOCATION: _____


SERIES 5100 AUTOMATIC SLIDING DOORS

TYPE: 5143-1, 0-SX-0-SX-0, BI-PART
with Under Header Extra Panel Assembly (UHEPA) **PAGE 1**

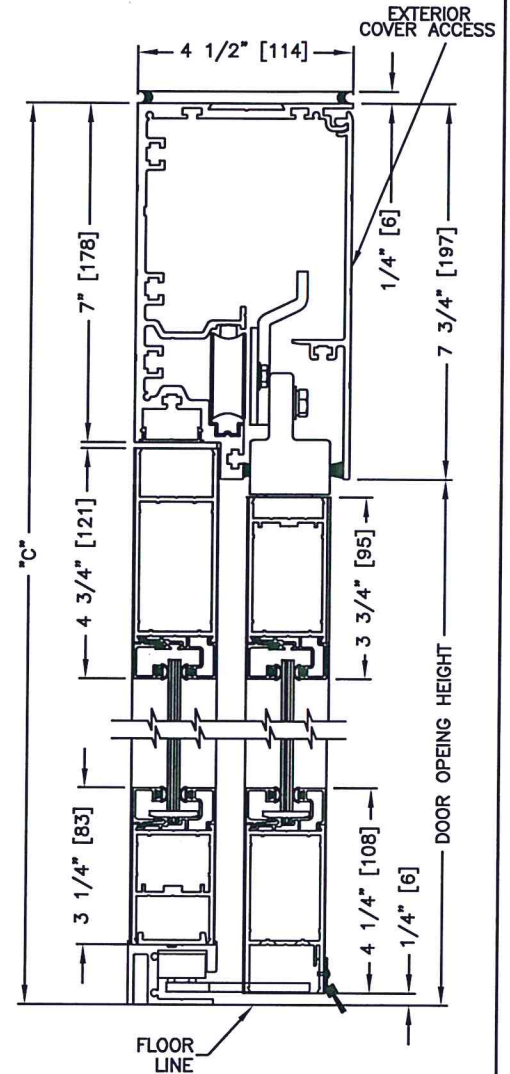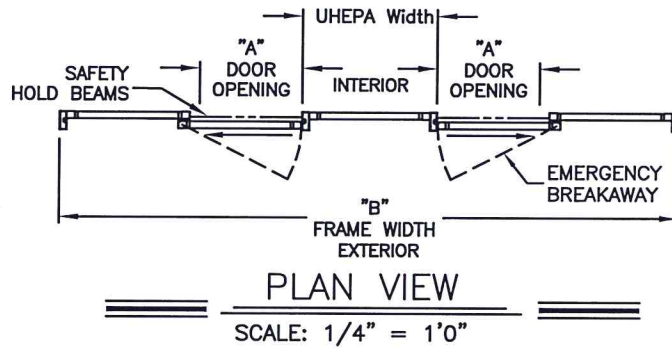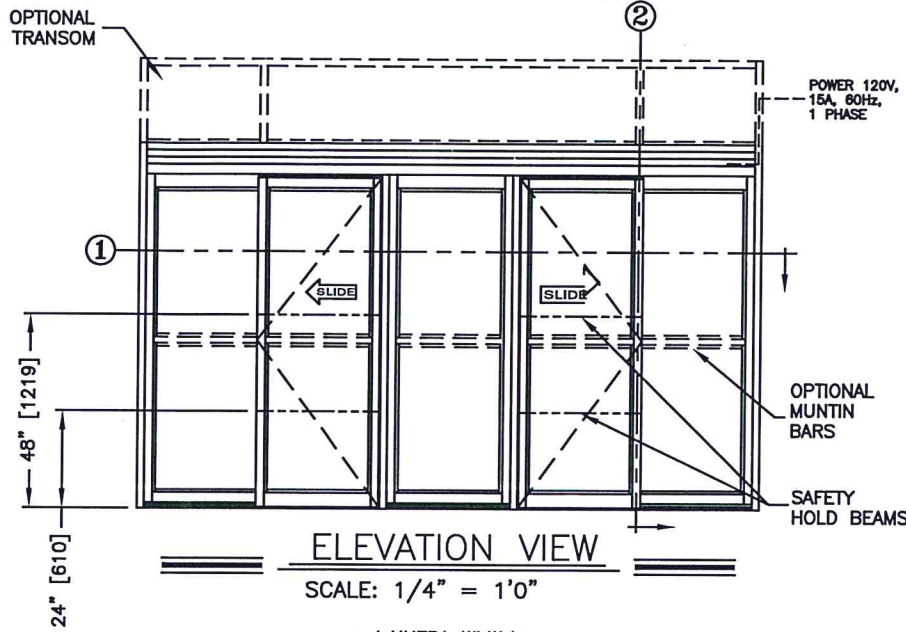

NOTES:

1. See sheets 51-2.86 thru 51-2.91 for optional muntins, bottom rails, transoms, glazing variations, bottom guides & thresholds.

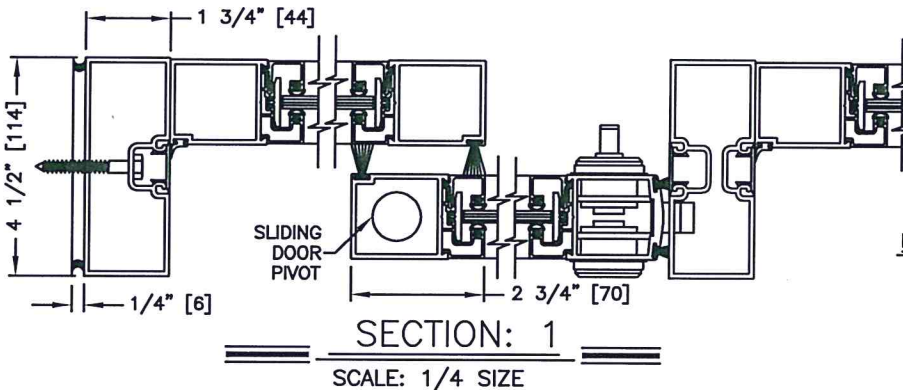

DIMENSIONS FOR STANDARD NARROW STILE PACKAGES

DOOR OPENING "A"	STD. PACKAGE WIDTH "B"	STD. PACKAGE HEIGHT "C" W OR W/O THRESHOLD	DOOR OPENING HEIGHT W/THRESHOLD	DOOR OPENING HEIGHT W/O THRESHOLD
30-5/16 - (UHEPA Width/4)	144 (3658)	91 (2311)	82-3/4 (2102)	83-1/4 (2115)
36-5/16 - (UHEPA Width/4)	168 (4267)	91 (2311)	82-3/4 (2102)	83-1/4 (2115)
42-5/16 - (UHEPA Width/4)	192 (4877)	91 (2311)	82-3/4 (2102)	83-1/4 (2115)

Masonry opening is 1/4" (6) per side larger and 1/4" taller than package dimensions. Measurements given in inches (millimeters).
All Door Opening "A" dimensions provided are for optimized DOW and