
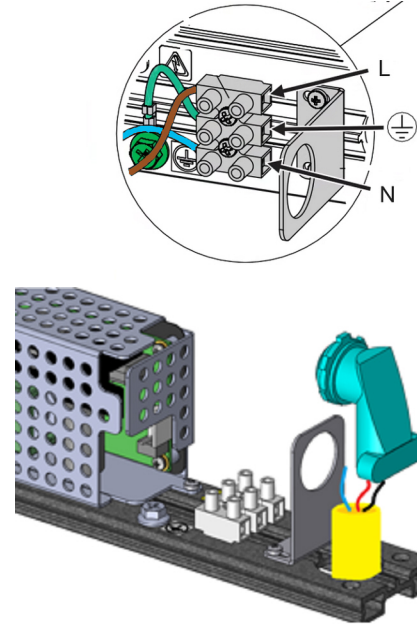
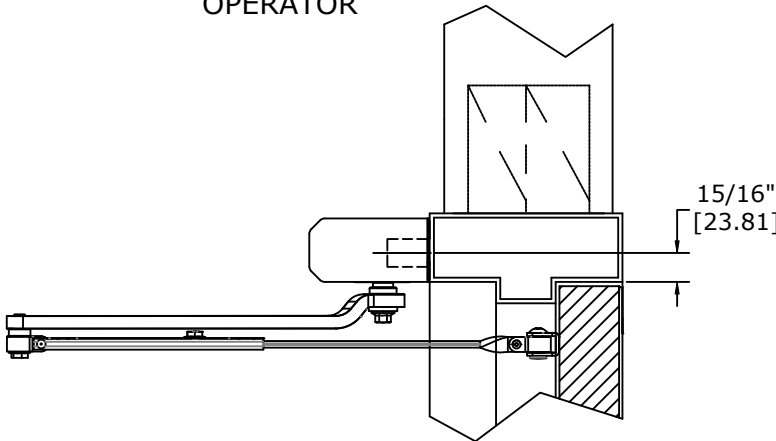
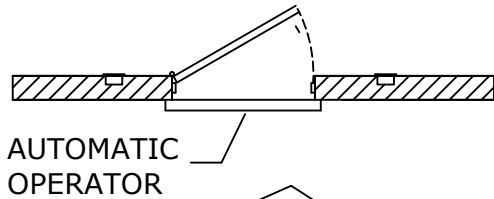
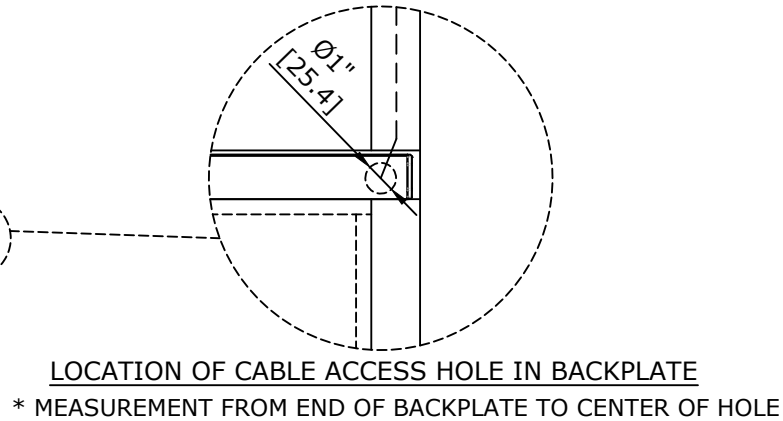


TYPICAL WIRING DETAIL/SINGLE ALUMINUM DOOR

- HA7 SINGLE DOOR OPERATOR/ PUSH APPLICATION, LEFT HAND, RIGHT HAND
- FOR INFORMATION ONLY, THE WIRING REQUIRED FOR A SPECIFIC PROJECT MAY DIFFER
- THE WIRING MUST BE IN THE SAME SIDE AS THE INSTALLATION OF THE HEADER OF THE HA7 DOOR OPERATOR

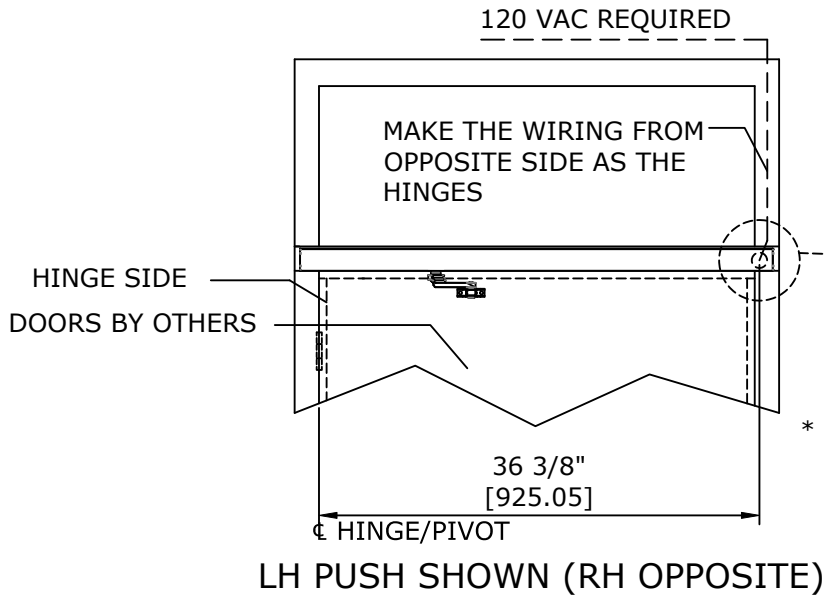

ELECTRICAL CONNECTION INSIDE HA7

USE 3/8" GALFLEX (OR EQUAL) RWS METALLIC ARMORED FLEXIBLE CONDUIT (MIN 14 GA), RIGHT ANGLE ADAPTOR TO BE SUPPLIED BY ELECTRICIAN FOR ELECTRICAL CONNECTION

ADDITIONAL INFORMATION

- THE 120V WILL BE CONNECTED INSIDE THE OPERATOR BY ELECTRICAL CONTRACTOR
- WARNING, THE OPENING DIRECTION MAY BE DIFFERENT THAN THE PROVIDED DRAWING
- POWER ACCESS HOLE WILL ALWAYS BE 36 3/8" FROM THE HINGE NO MATTER SIZE OF THE DOOR.

DWG NO. D001570714-001						
DRN BY	SS	DATE	1/10/25	CHK BY	DATE	REV. 1.0 DATE 1/10/25