


DITEC HA7 - LOW ENERGY
SURFACE APPLIED
SWING DOOR OPERATOR
" PULL APPLICATION "

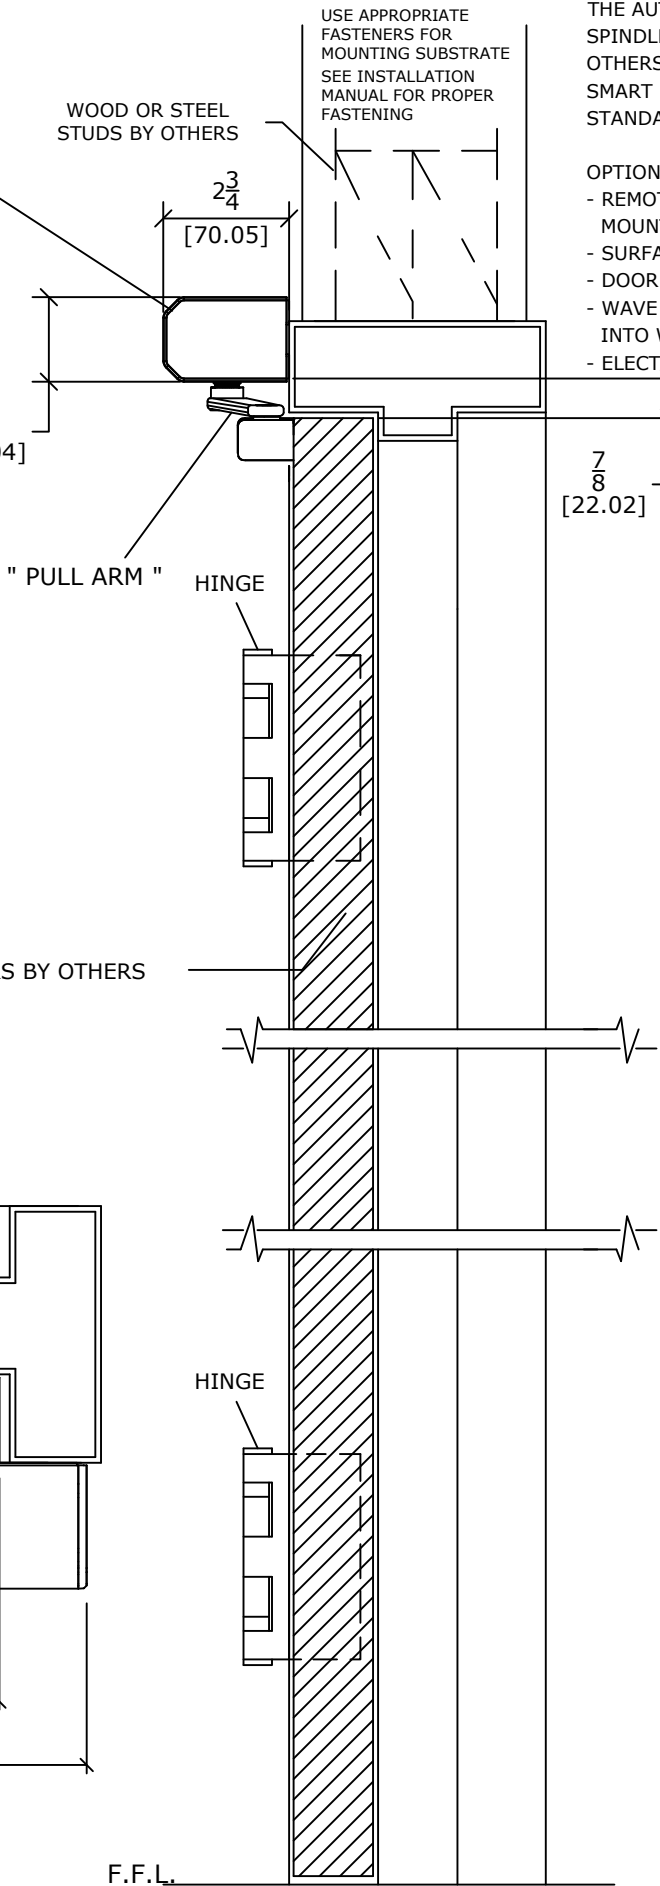

NOTE: THE STANDARD PACKAGE CONSISTS OF:

THE AUTOMATIC OPERATOR, CONTROLLER, POWER SUPPLY, POWER SUPPLY HOLDER, PULL ARM, SPINDLE COVERS, HOLD/AUTO/OFF SWITCH, SMART DEVICE OPERATION VIA APP (DEVICE BY OTHERS), 5' POWER CORD, 14' POWER CORD EXTENSION, ELECTRONIC & MECHANICAL LOCK KICK. SMART DEVICE DIAGNOSTICS & STATISTICS VIA APP (DEVICE BY OTHERS)
STANDARD FINISH: CLEAR OR DARK BRONZE

OPTIONS:

- REMOTE POWER BOX ADAPTOR KIT, CONCEALED IN CEILING OR FLUSH MOUNTED IN WALL. CUT SHEET AA-61
- SURFACE MOUNTED WIRE MOLD
- DOOR MOUNTED APPROACH SIDE SAFETY SENSOR
- WAVE OR PRESS ACTIVATION PLATES (PLATES CAN BE CONCEALED INTO WALL OR SURFACE MOUNTED WITH WATER RESISTANT PLASTIC ENCLOSURE)
- ELECTRIC STRIKE TO RELEASE DOOR LATCH (IF EQUIPPED)

AUTOMATIC :-


ACTIVATE THE DOOR BY HANDICAPPED
WAVE/PRESS PLATE AND THE DOOR WILL SLOWLY
POWER OPEN, TIME OUT, AND SLOWLY
CLOSE.

PUSH ACTIVATION :- (OPTIONAL)

PUSH OR PULL THE DOOR AND IT WILL SLOWLY POWER OPEN , TIME OUT, AND SLOWLY CLOSE.

NOTE : OPERATIONAL ADJUSTMENTS TO BE IN ACCORDANCE WITH ANSI/BHMA A156.19 STANDARD. FOR LOW ENERGY POWER OPERATED DOORS.

NOTE : WAVE/PRESS PLATE ACTIVATION TO BE LOCATED
WITHIN VIEW OF THE DOOR. REFERENCE ANSI A156.19
FOR FURTHER DETAILS.

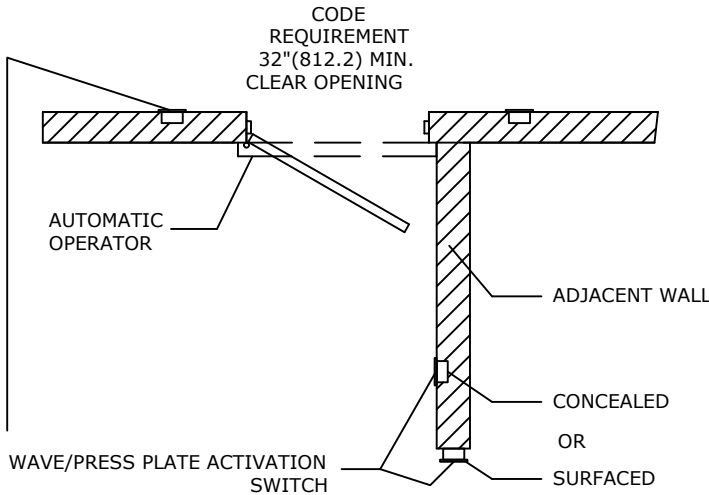

DWG NO. 1021476					
DRN BY	SS	DATE	7/23/20	CHK BY	
				DATE	
				REV.	3.0
				DATE	7/14/22



NOTE: DRAWING IS DIMENSIONED IN BOTH ENGLISH AND METRIC.
REF. AS FOLLOWS: 1" (25.4). ALL METRIC SIZES ARE IN MILLIMETERS.

* FOR MAXIMUM CURRENT DRAW PER OPERATOR, SEE PRODUCT SPECIFICATION OR INSTALLATION INSTRUCTIONS.
POWER ADAPTOR TO BE INSTALLED PER NFPA 70/NEC REQUIREMENTS AND/OR AHJ