
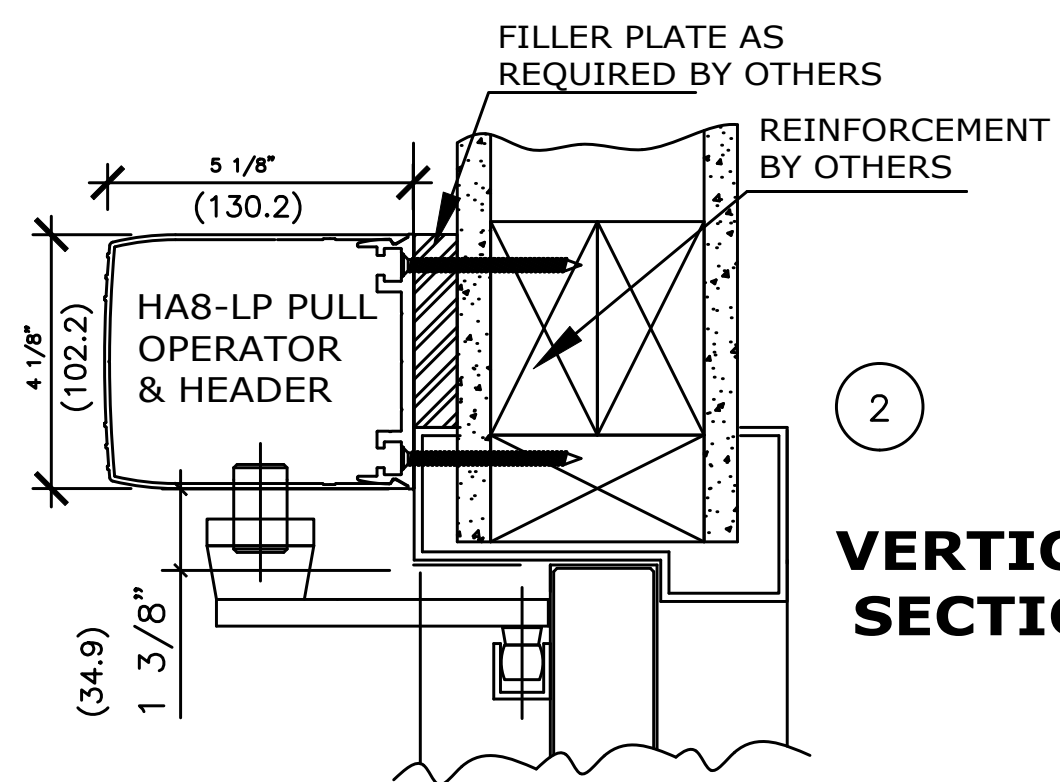
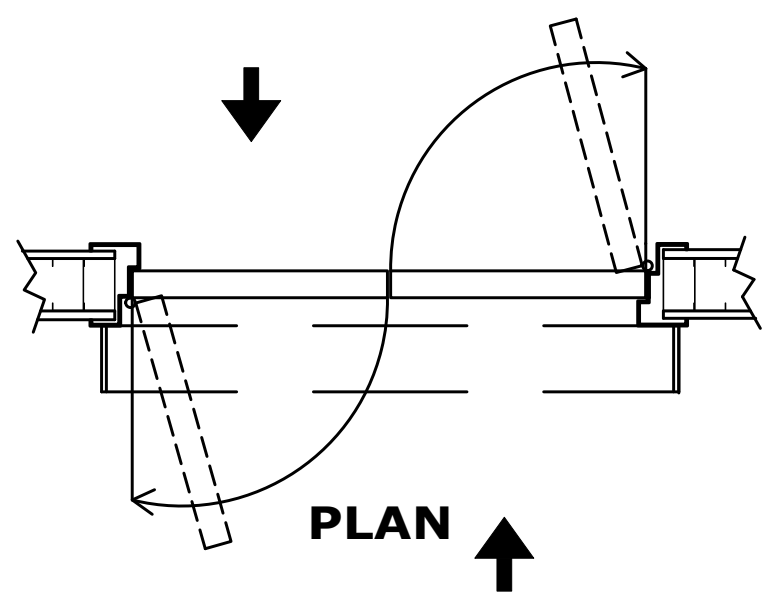


APPLICATION: LOW PROFILE, LOW
ENERGY OPERATOR DUAL EGRESS
RIGHT HAND


NOTE: DRAWING IS DIMENSIONED IN BOTH INCHES & METRIC (mm)
AUTOMATIC SWING DOOR OPERATOR SHALL BE "FA8" CETL USA
APPROVED, CONFORMING TO UL STD. 325 & ANSI-BHMA STD. A156.19
FIRE RATED TO UL STD. 10(B); UL STD. 10(C), CERTIFIED TO CAN.
CSA STD. C22.2#247 AS MANUFACTURED BY RECORDED-USA.
32" (813) CLEAR OPENING REQUIRED TO MEET ADA REQUIREMENT.

STANDARD FINISH: ANODIZED, CLEAR; DARK BRONZE;
SPECIAL FINISHES ARE AVAILABLE

120V AC. 60HZ. 15A.
BY ELEC. CONTRACTOR.

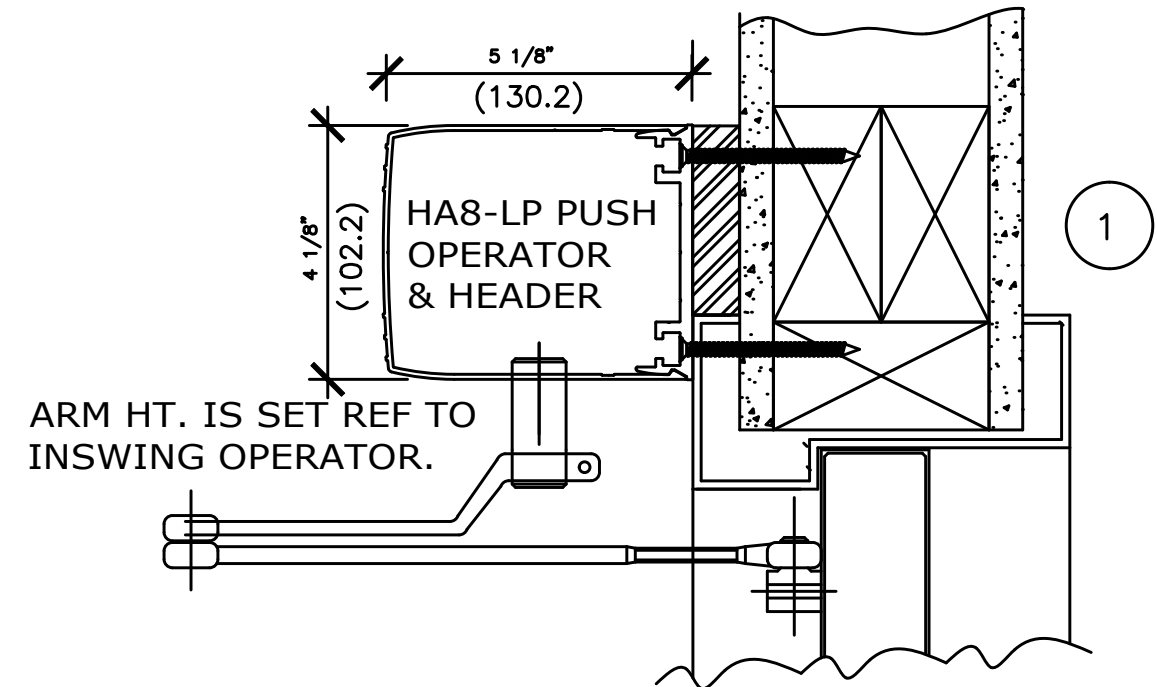


**VERTICAL
SECTION**

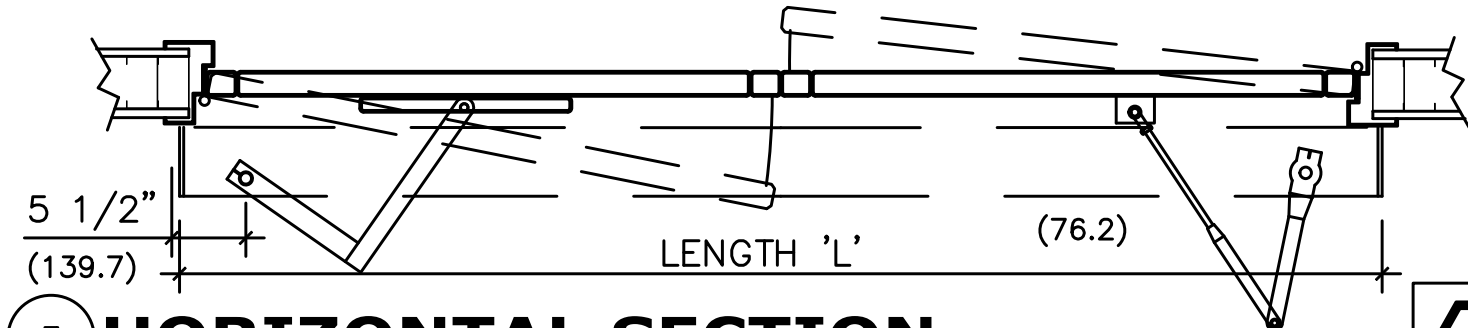

3 HORIZONTAL SECTION
HA8-LP HEADER
'L' = DOOR WIDTH + 3"

AUTOMATIC
CAUTION
DOOR

SWING HOLLOW
METAL, ALUMINUM
OR WOOD DOORS
AND FRAMES BY
OTHERS

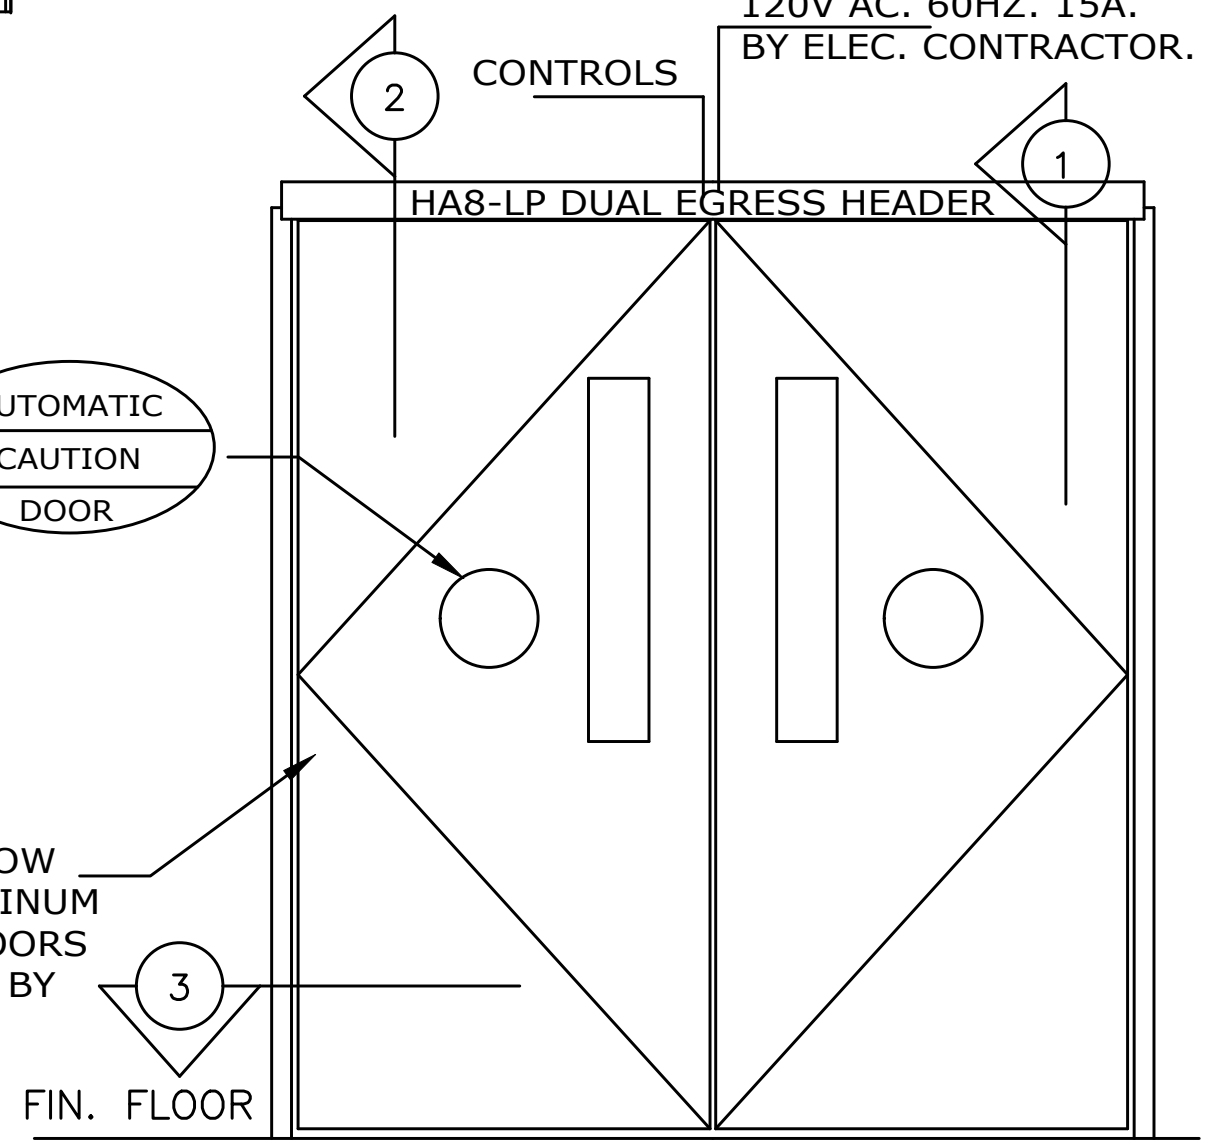

ELEVATION



TEL. 877-348-6837 (CANADA)
TEL. 833-921-1337 (USA)
www.recorddoors.com

JOB NAME:	SHEET NO. 7 SECTION LP
LOCATION:	
DOOR NUMBER:	