
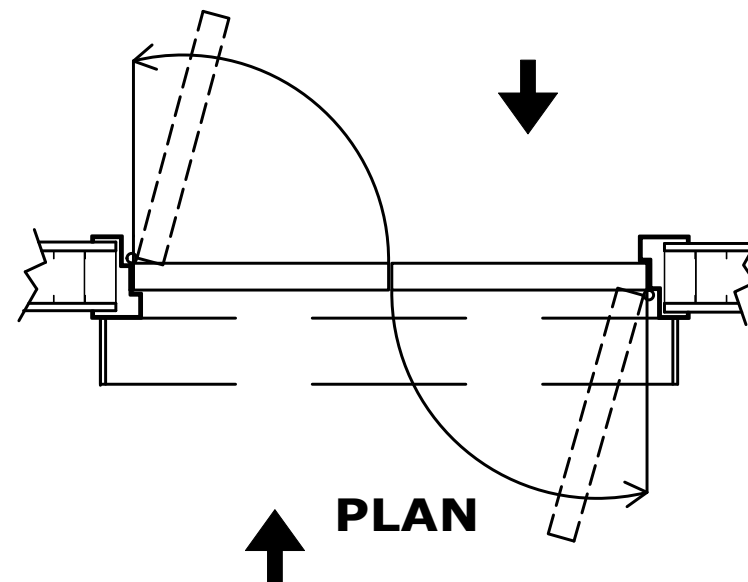


APPLICATION: LOW PROFILE, LOW ENERGY OPERATOR DUAL EGRESS LEFT HAND


NOTE: DRAWING IS DIMENSIONED IN BOTH INCHES & METRIC (mm)
 AUTOMATIC SWING DOOR OPERATOR SHALL BE "FA8" CETL USA APPROVED, CONFORMING TO UL STD. 325 & ANSI-BHMA STD. A156.19
 FIRE RATED TO UL STD. 10(B); UL STD. 10(C), CERTIFIED TO CAN. CSA STD. C22.2#247 AS MANUFACTURED BY RECORDED-USA.
 32" (813) CLEAR OPENING REQUIRED TO MEET ADA REQUIREMENT.

STANDARD FINISH: ANODIZED, CLEAR; DARK BRONZE;
 SPECIAL FINISHES ARE AVAILABLE

120V AC. 60HZ. 15A.
 BY ELEC. CONTRACTOR.

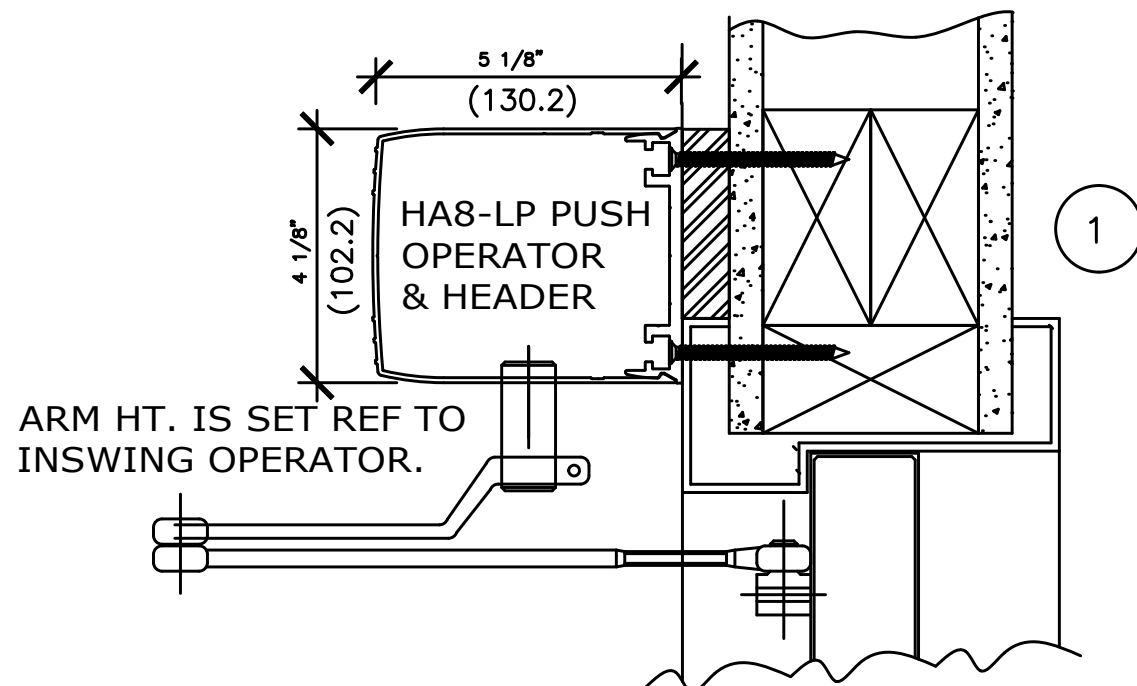


FILLER PLATE AS
 REQUIRED BY OTHERS

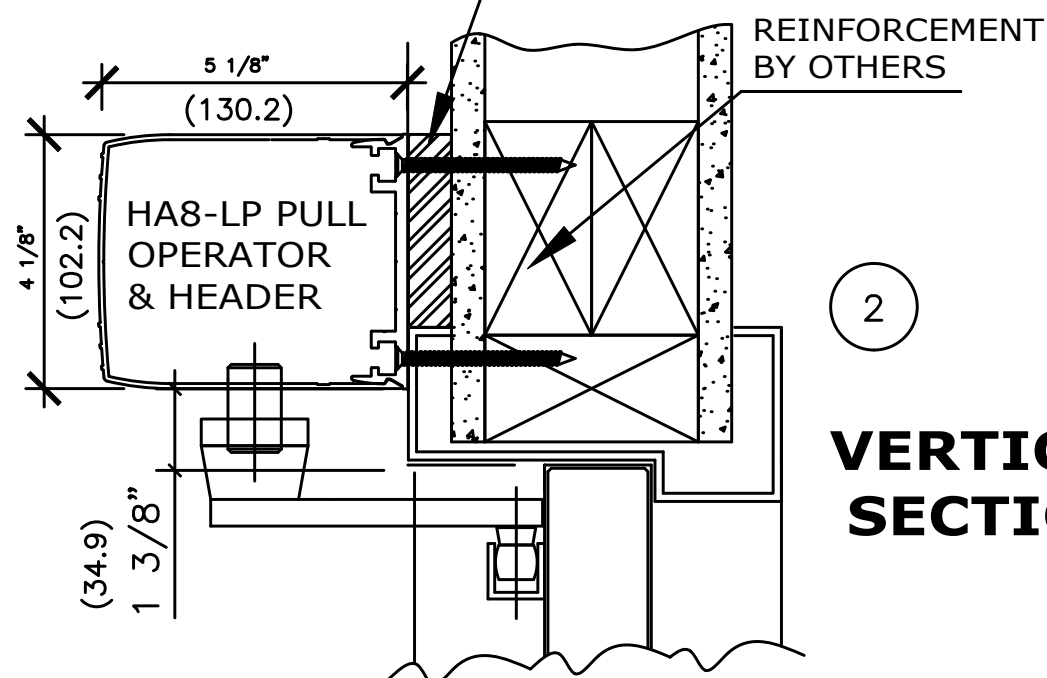


VERTICAL SECTION

AUTOMATIC
 CAUTION
 DOOR

SWING HOLLOW
 METAL, ALUMINUM
 OR WOOD DOORS
 AND FRAMES BY
 OTHERS

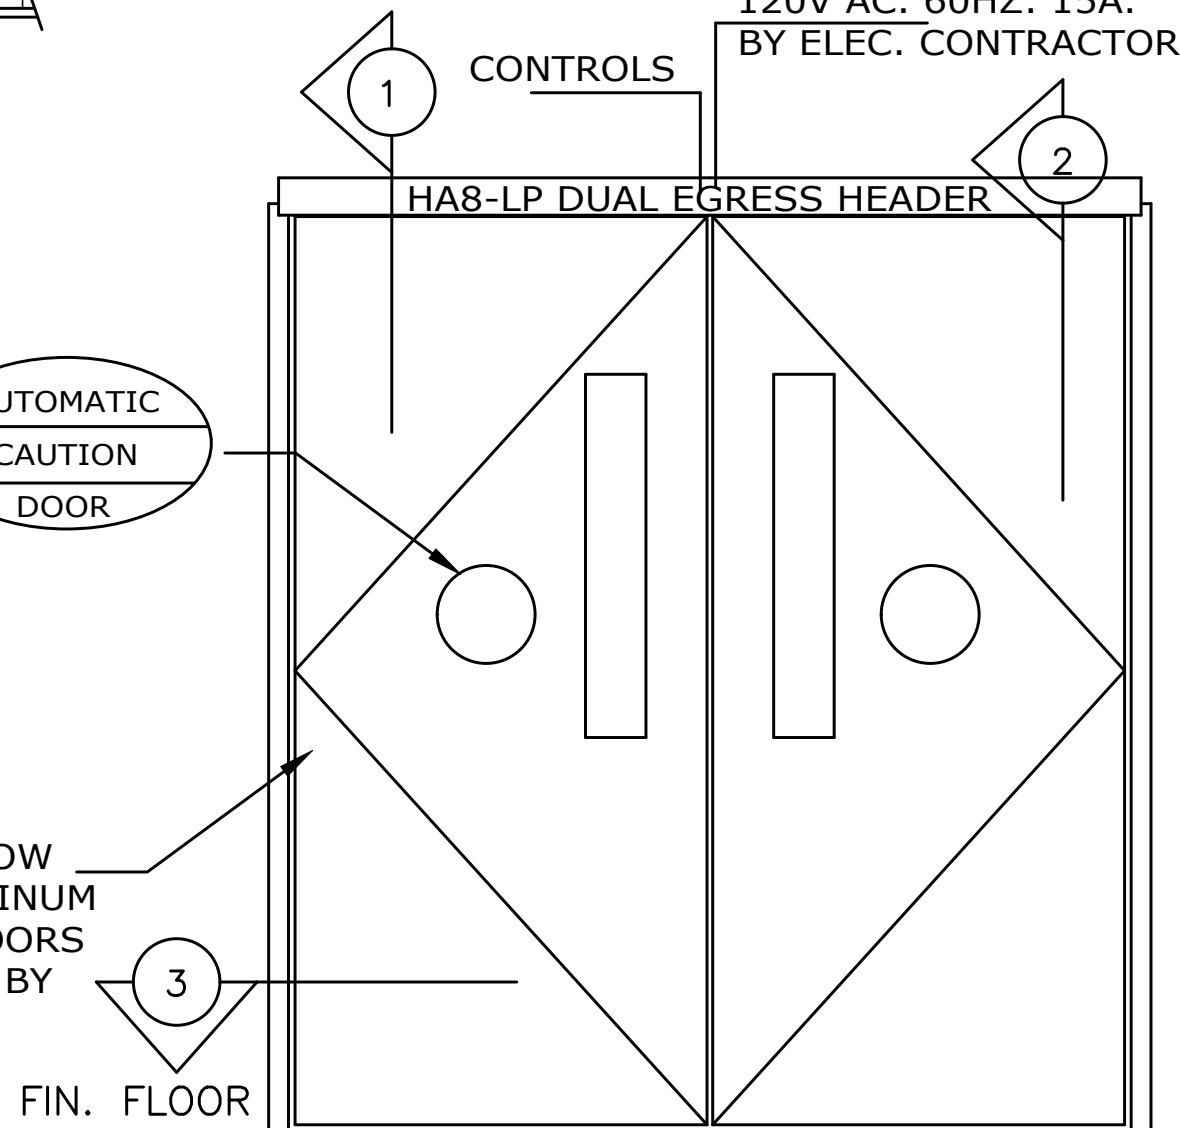

ELEVATION

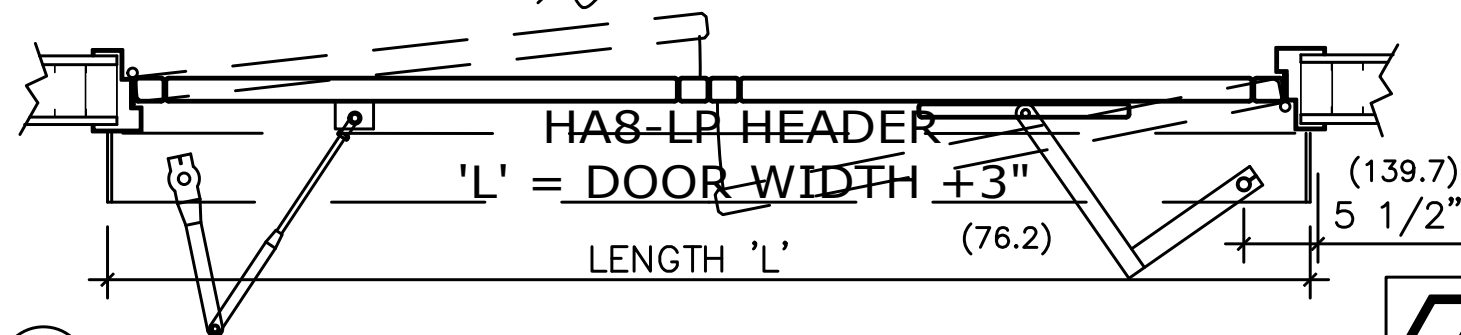

HORIZONTAL SECTION



TEL. 877-348-6837 (CANADA)
 TEL. 833-921-1337 (USA)
 www.recorddoors.com

JOB NAME:	SHEET NO. 8
LOCATION:	
DOOR NUMBER:	SECTION LP