



APPLICATION:
LOW PROFILE, LOW ENERGY
OPERATOR LEFT HAND PULL

NOTE: DRAWING IS DIMENSIONED IN BOTH INCHES & METRIC (mm)
AUTOMATIC SWING DOOR OPERATOR SHALL BE "HA9" CETL USA
APPROVED, CONFORMING TO UL STD. 325 & ANSI-BHMA STD. A156.19
FIRE RATED TO UL STD. 10(B); UL STD. 10(C), CERTIFIED TO CAN.
CSA STD. C22.2#247 AS MANUFACTURED BY RECORDED-USA.
32" (813) CLEAR OPENING REQUIRED TO MEET ADA REQUIREMENT.


STANDARD FINISH: ANODIZED, CLEAR; DARK BRONZE;
SPECIAL FINISHES ARE AVAILABLE

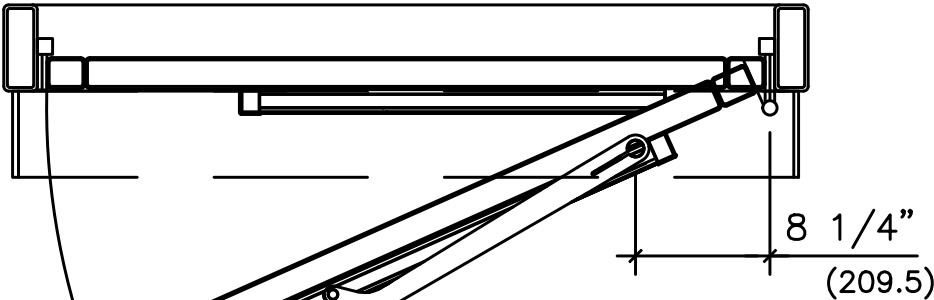


INTERIOR
PLAN

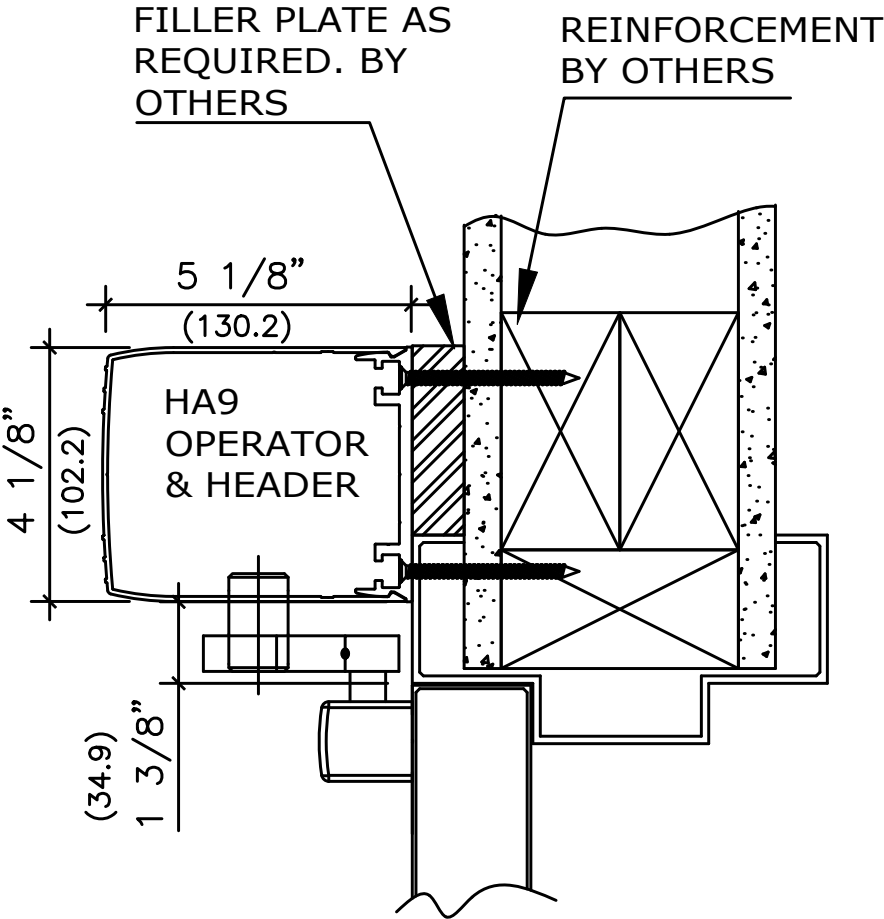

**VERTICAL
SECTION**

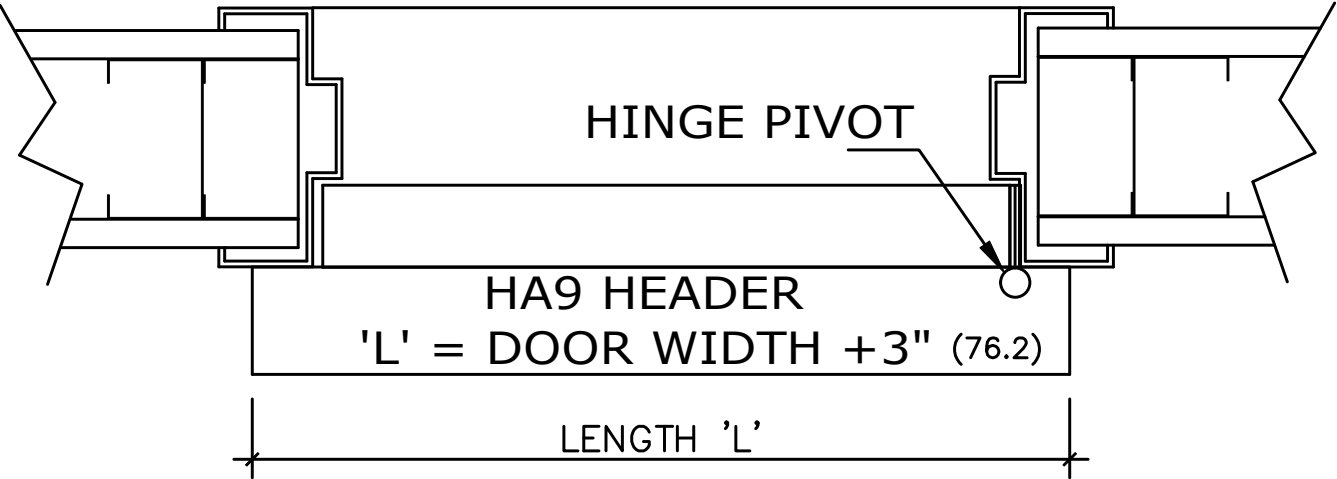

INTERIOR
HORIZONTAL SECTION

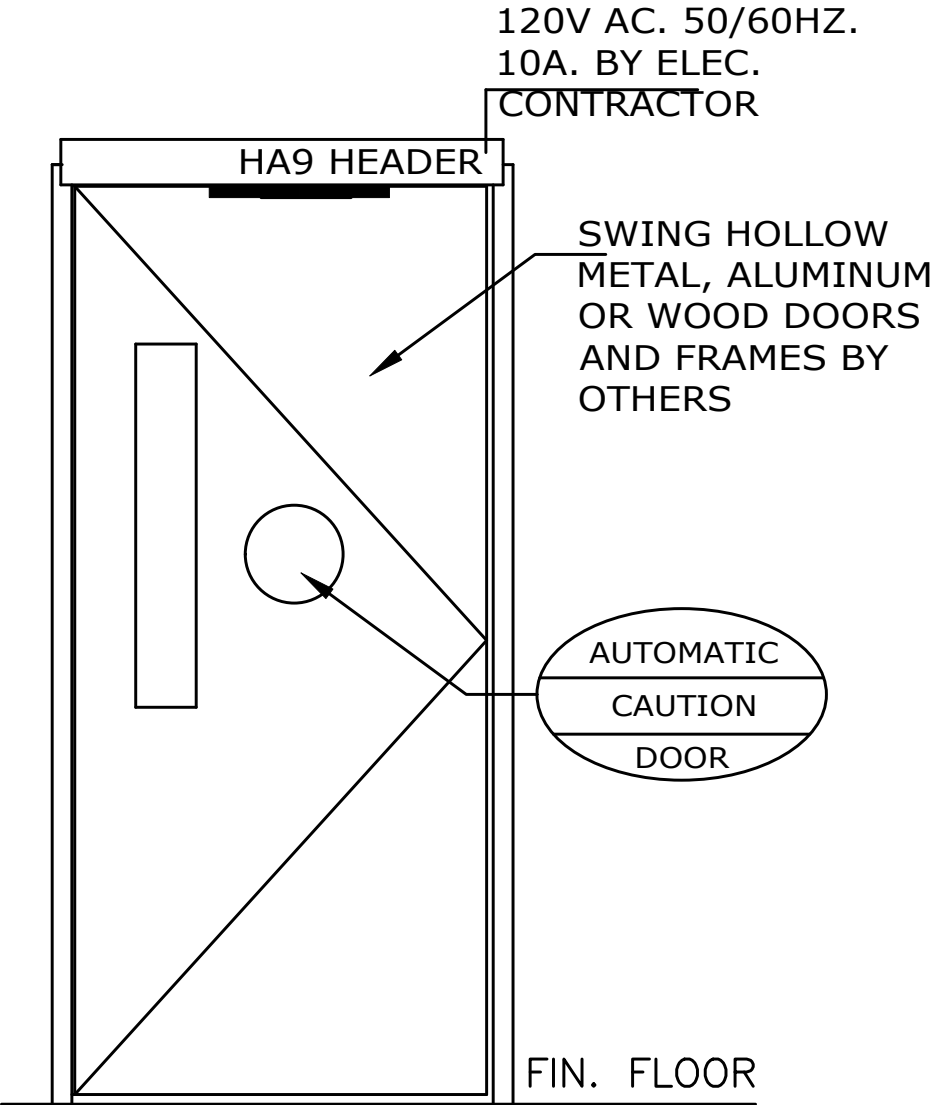

ELEVATION



TEL. 877-348-6837 (CANADA)
TEL. 833-921-1337 (USA)
www.recorddoors.com

JOB NAME:	SHEET NO. 5 SECTION HA9
LOCATION:	
DOOR NUMBER:	