


120V AC. 50/60HZ.
10A. BY ELEC.
CONTRACTOR.

APPLICATION:
LOW PROFILE, LOW ENERGY
OPERATOR PAIR DOORS PULL

NOTE: DRAWING IS DIMENSIONED IN BOTH INCHES & METRIC (mm)
AUTOMATIC SWING DOOR OPERATOR SHALL BE "HA9" CETL USA
APPROVED, CONFORMING TO UL STD. 325 & ANSI-BHMA STD. A156.19
FIRE RATED TO UL STD. 10(B); UL STD. 10(C), CERTIFIED TO CAN.
CSA STD. C22.2#247 AS MANUFACTURED BY RECORDED-USA.
32" (813) CLEAR OPENING REQUIRED TO MEET ADA REQUIREMENT.

STANDARD FINISH: ANODIZED, CLEAR; DARK BRONZE;
SPECIAL FINISHES ARE AVAILABLE

SWING HOLLOW
METAL, ALUMINUM
OR WOOD DOORS
AND FRAMES BY
OTHERS

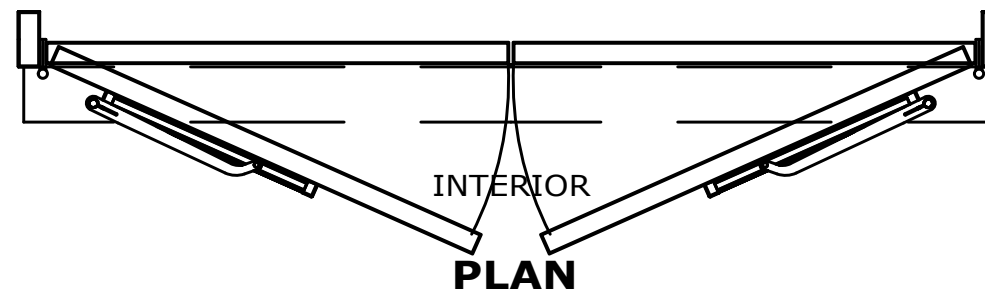


AUTOMATIC
CAUTION
DOOR

FIN. FLOOR

ELEVATION

FILLER PLATE AS
REQUIRED. BY
OTHERS

REINFORCEMENT
BY OTHERS

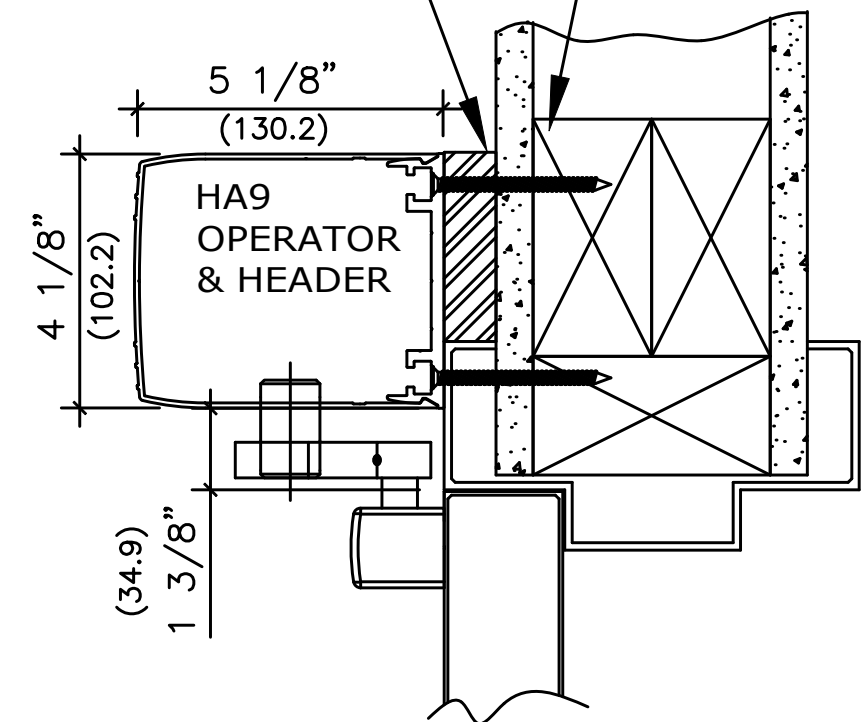

**VERTICAL
SECTION**

HINGE PIVOT

HA9 HEADER

'L' = DOOR WIDTH + 3"

LENGTH 'L'

(76.2)

INTERIOR

HORIZONTAL SECTION



TEL. 877-348-6837 (CANADA)
TEL. 833-921-1337 (USA)
www.recorddoors.com

JOB NAME:

LOCATION:

DOOR NUMBER:

SHEET NO.

6

SECTION

HA9