
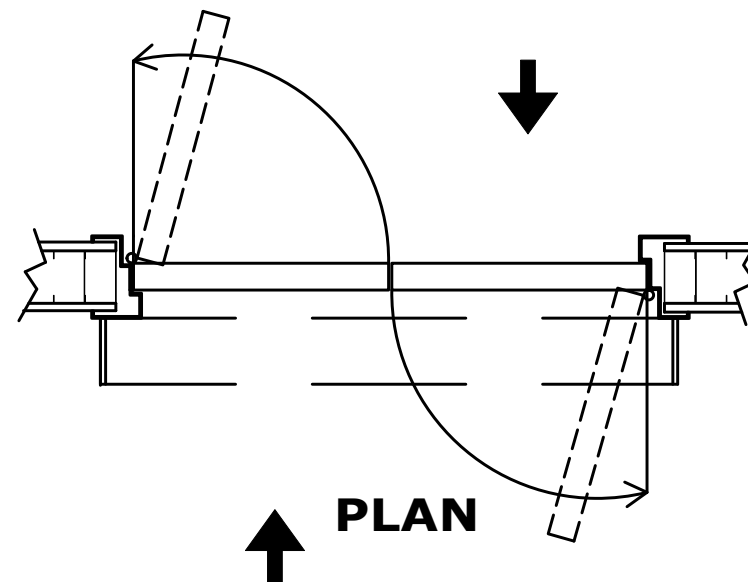


**APPLICATION: LOW PROFILE, LOW
ENERGY OPERATOR DUAL EGRESS
LEFT HAND**

NOTE: DRAWING IS DIMENSIONED IN BOTH INCHES & METRIC (mm)
AUTOMATIC SWING DOOR OPERATOR SHALL BE "HA9" CETL USA
APPROVED, CONFORMING TO UL STD. 325 & ANSI-BHMA STD. A156.19
FIRE RATED TO UL STD. 10(B); UL STD. 10(C), CERTIFIED TO CAN.
CSA STD. C22.2#247 AS MANUFACTURED BY RECORDED-USA.
32" (813) CLEAR OPENING REQUIRED TO MEET ADA REQUIREMENT.


STANDARD FINISH: ANODIZED, CLEAR; DARK BRONZE;
SPECIAL FINISHES ARE AVAILABLE

120V AC. 50/60HZ. 10A.
BY ELEC. CONTRACTOR.

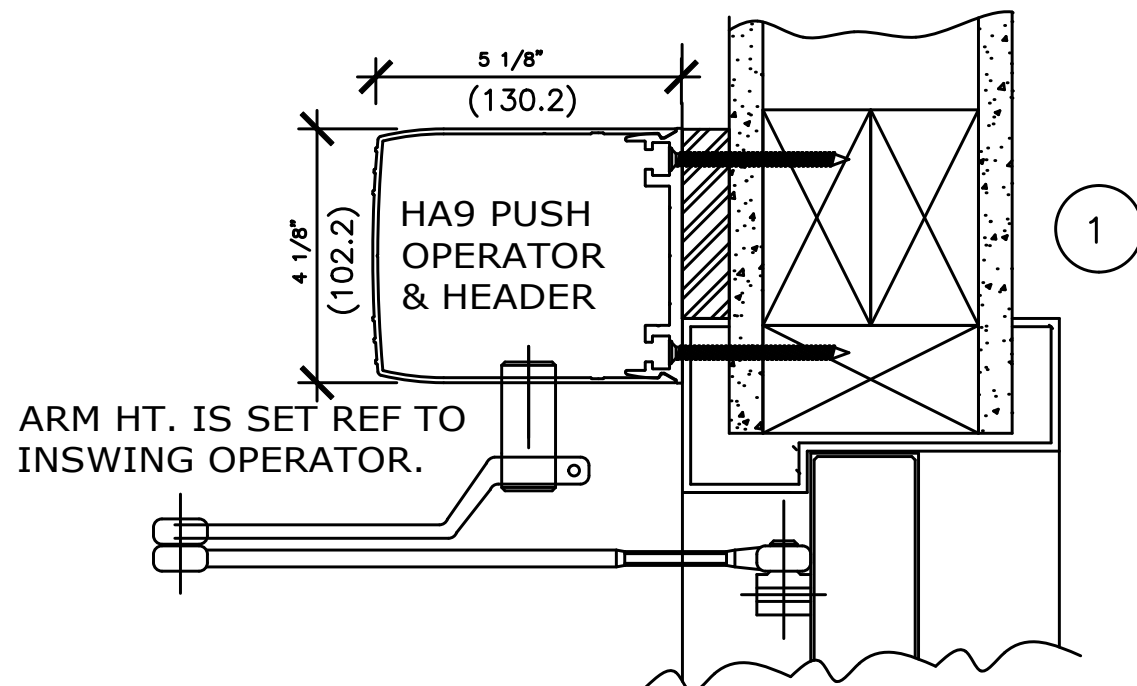


FILLER PLATE AS
REQUIRED BY OTHERS


REINFORCEMENT
BY OTHERS

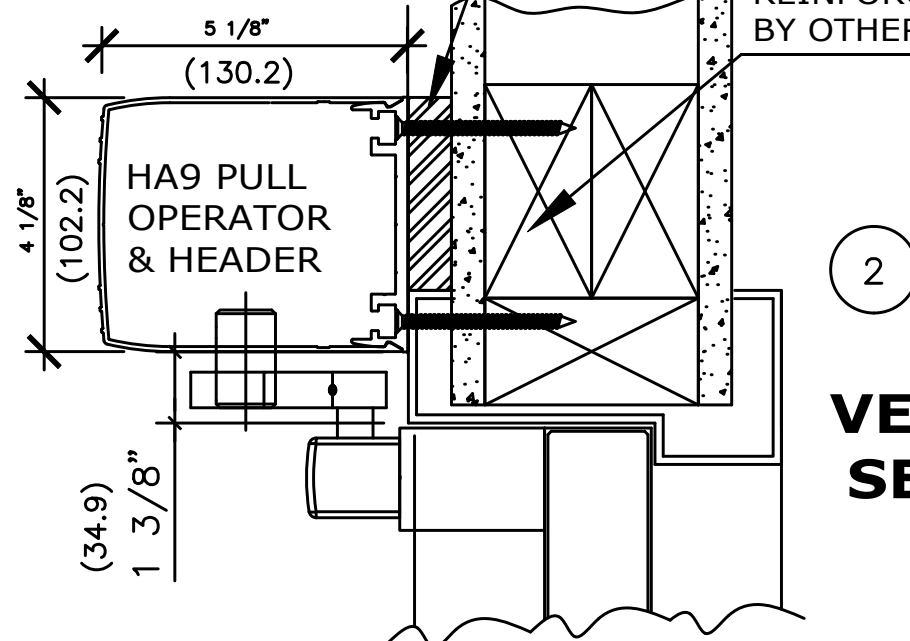


**VERTICAL
SECTION**



SWING HOLLOW
METAL, ALUMINUM
OR WOOD DOORS
AND FRAMES BY
OTHERS

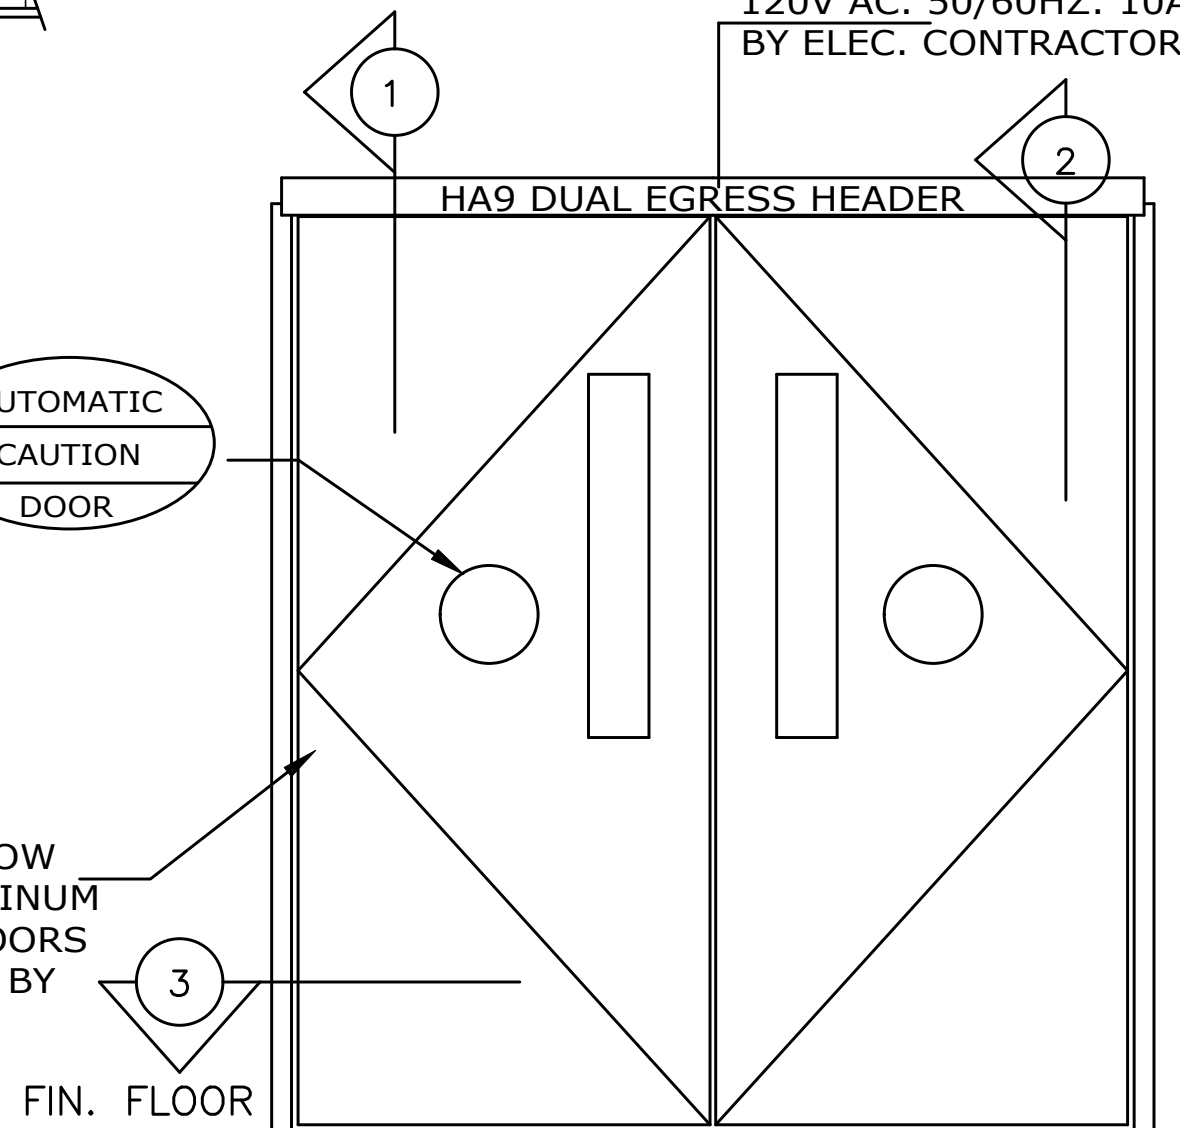

ELEVATION

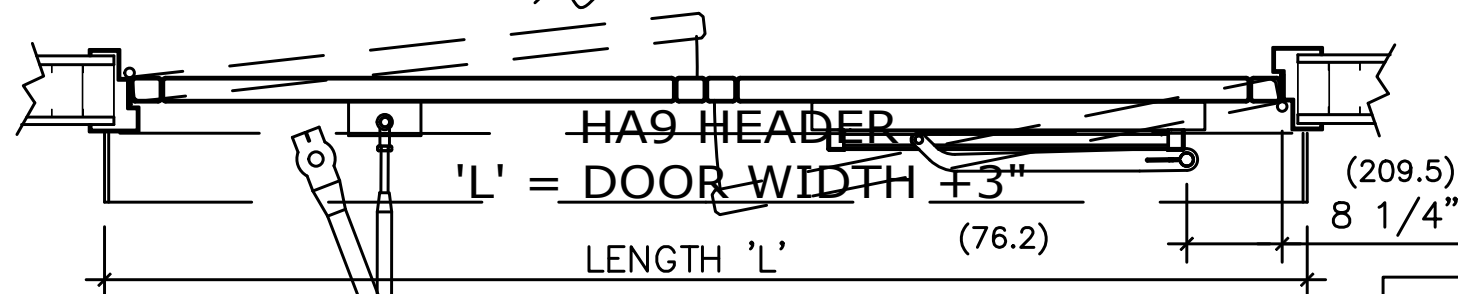

3 HORIZONTAL SECTION



TEL. 877-348-6837 (CANADA)
TEL. 833-921-1337 (USA)
www.recorddoors.com

JOB NAME:	SHEET NO. 8 SECTION HA9
LOCATION:	
DOOR NUMBER:	